PEARSON™ CURRENT MONITOR MODEL 6535-03



Sensitivity 0.005 V/A ±1 %

Output resistance 50 Ohm

Maximum peak current 5 000 A

Maximum rms current 30 A

Droop rate 1.5 %/ms

Useable rise time 20 ns

Current time product 0.04 A s maximum*

Low frequency 3dB point 2.5 Hz (approximate)

High frequency 3dB point 20 MHz (approximate)


I/f figure 0.25 peak A/Hz

Output connector SMA

Operating temperature 0 to 65 °C Weight 16 gm

* Maximum current-time product can be obtained by using core-reset bias as described in the *Application Notes*. 0.014 Ampere-second is typical without bias.

© 2005 Pearson Electronics, Inc. 6535-03.wpd 050112

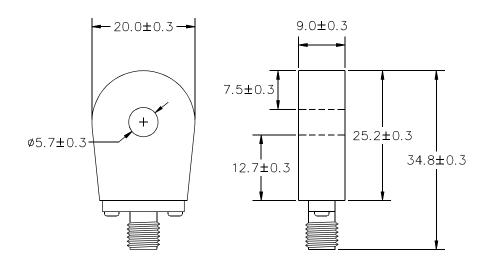

Dimensions in mm