

DP 2500

DP Range: 9 kHz - 250 MHz / 2500 W CW



Prana DP 2500

- Class A solid state
- Broadband (instantaneous single band): 9 kHz – 250 MHz
- Frequency extension between 4 kHz and 9 kHz upon request
- Typical output power : 2500 W CW
- Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
 - P1dB >1800 W and H<-20dBc at 9 kHz
 - P1dB >2000 W and H<-20dBc from 10 kHz to 50 MHz
 - P1dB >1300 W and H<-20dBc from 50 MHz to 250 MHz
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Reliable, efficient and robust
- 19" Cabinet on wheels
- 3 years standard warranty

Maintenance

- Amplifier designed for minimal maintenance
 - Easy access to all parts
 - Modular design
 - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions

- DP 2500 DC amplifier with:
 - Multicolor LCD display with touch panel
 - Digital control
 - IEEE 488 GPIB, Ethernet, USB, RS232 Communications
 - Temperature controlled fans
 - Safety interlock
 - Integrated dual directional coupler
 - Display of instantaneous incident and reflected power

DP Range

- DP 90 => 90 W CW
- DP 180 => 180 W CW
- DP 340 => 340 W CW
- DP 670 => 670 W CW
- DP 1350 => 1350 W CW
- DP 2500 => 2500 W CW
- DP 5000 => 5000 W CW
- DP 10000 => 10000 W CW
- DP 16000 => 16000 W CW

Extra

- External coupler
- Bulk Current Injection + Calibration JIG
- RF Power cable
- Switching unit

4TECT

OOO «4TECT»


Телефон: +7 (499) 685-4444

info@4test.ru

www.4test.ru

DP 2500

DP Range: 9 kHz - 250 MHz / 2500 W CW

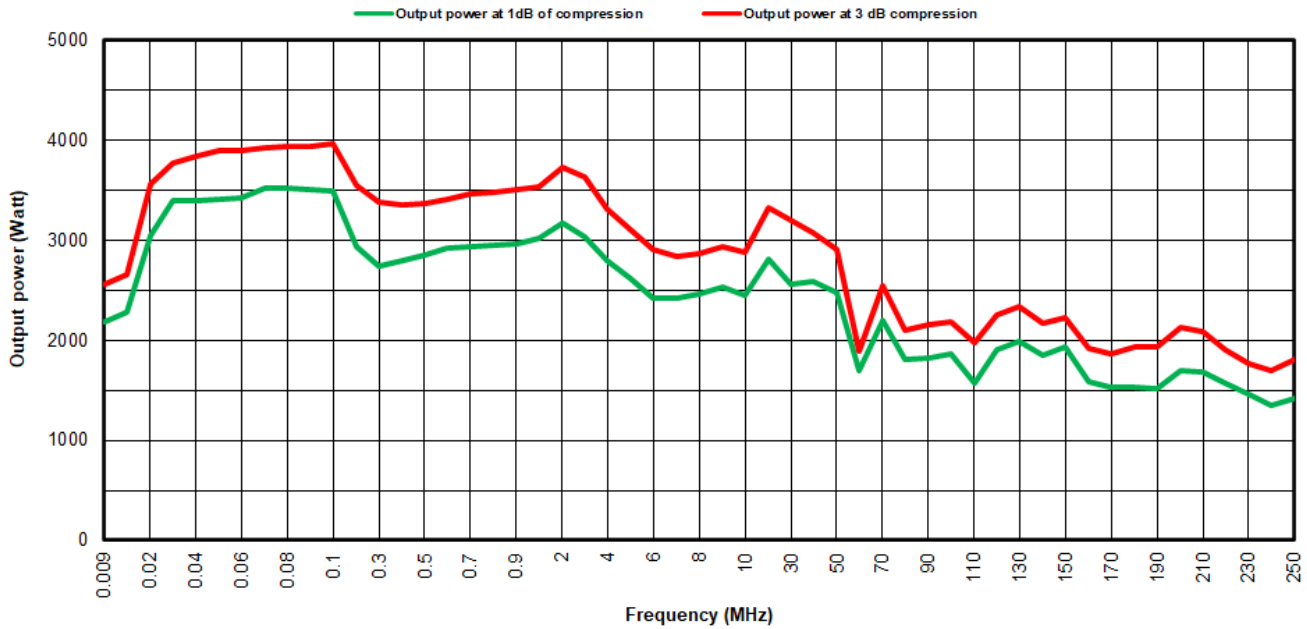

Specifications

Frequency bandwidth	9 kHz - 250 MHz
Typical output power	2500 W
Minimum power at 3 dB compression	2.3kW 9kHz/ 2.5kW 10kHz-50MHz/ 1.5kW 30-250MHz
Minimum power at 1 dB compression	1.8kW 9kHz/ 2kW 10kHz-30MHz/ 1.3kW 30-225MHz/ 1.2kW 225-250MHz
Harmonics distortion	H2,H3 < -20 dBc for the output power at 1 dB compression limit
Class type	Class A
Gain	63 dB
Linear power gain flatness	± 3 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1 max
Output impedance	50 ohms / VSWR: 2:1 max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type 7/16 fem. (front or rear panel) – other connector type on request
Integrated bidirectional power coupler	Coupling factor 69 dB typ.
Power coupling connector	Type N fem. (front or rear panel)
Safety interlock	Connector type BNC
Digital control	Transistors, power supplies, temperatures and fans
Mismatch protection	Self limitation for reflected power > 1000 W
Communication interface	Ethernet, USB, GPIB, RS232
Color LCD display with touch screen	Status, faults, direct and reverse instantaneous power
Ambient operating temperature	0 °C / + 35 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air with fan speed control: 480 l/sec max. (self contained fans)
Mains voltage	47-63 Hz, 3 phases (star or delta)
Rated current	10.35 kVA
Dimensions	800 x 840 x 1590 mm (30U) / 31.5 x 33.1 x 62.6 in (30U)
Weight	390 kg / 858 lb

4TECT

ООО «4TECT»
 Телефон: +7 (499) 685-4444
 info@4test.ru
 www.4test.ru