



2.92mm Female to 2.4mm Male Adapter

2.92mm female to 2.4mm male adapter part number FMAD1027 from Fairview Microwave is in-stock and ships same day. This Fairview 2.92mm to 2.4mm adapter has a female to male gender configuration. FMAD1027 2.92mm female to 2.4mm male adapter operates to 40 GHz. The 2.92mm connector mates mechanically with commercially available SMA and 3.5mm connectors. The 2.4mm connector mates mechanically with commercially available 1.85mm (V) connectors. The Fairview Microwave RF adapter provides good VSWR of 1.35:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units	
Frequency Range	DC		40	GHz	
VSWR			1.35:1		

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 18	18 to 40				GHz
VSWR, Max	1.15:1	1.35:1				

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

Length	0.752 in [19.1 mm]
Width	0.312 in [7.92 mm]
Weight	0.008 lbs [3.63 g]

Description	Connector 1	Connector 2
Туре	2.92mm Female	2.4mm Male
Polarity	Standard	Standard
Mating Cycles	500	500
Mating Torque		8 to 10 in-lbs
		[0.90 to 1.13 Nm]



Configuration:

- 2.92mm Female Connector 1
- 2.4mm Male Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.35:1 max up to 40 GHz
- Contact plating according to MIL-G-45204
- Gold over Nickel Plated Beryllium Copper Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1	Connector 2				
Туре	2.92mm Female	2.4mm Male				
Contact Material	Beryllium Copper	Beryllium Copper				
Contact Plating	Gold over Nickel	Gold over Nickel				
Contact Plating Spec.	MIL-G-45204	MIL-G-45204				
Insulation Material	Oxide-Noryl	Oxide-Noryl				
Outer Contact Material	Passivated Stainless Ste	eel				
Outer Contact Plating Spec.	ASTM A380					
Body Material		Passivated Stainless Steel				
Body Plating Spec.		ASTM A380				
Coupling Nut Material		Passivated Stainless Steel				
Coupling Nut Plating Spec.		ASTM A380				

Environmental Specifications

Temperature


Operating Range Vibration Salt Spray -55 to +100 deg C MIL-STD 202, Method 204, Condition D (20 G's) MIL-STD 202, Method 101, Condition B, 5% salt solution

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

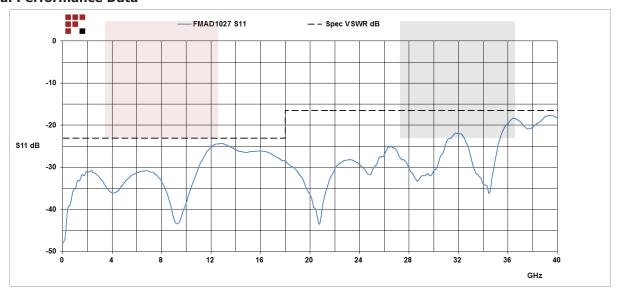





2.92mm Female to 2.4mm Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: 2.92mm Female to 2.4mm Male Adapter FMAD1027


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

URL: https://www.fairviewmicrowave.com/2.92mm-female-2.4mm-male-adapter-fmad1027-p.aspx

to implem	ent improv	ements.	Fairview	Microw	ave reserv	es the rigl	nt to mal	ke such	n changes	as rec	quired	d. Unles	s ot	herwise
stated, al	specificat	ions are	nominal.	Fairvie	w Microwa	ve does n	ot make	any re	epresenta	tion or	war	ranty re	gard	ling the
suitability	of the par	t describ	ed hereir	for any	y particulai	r purpose,	and Fai	rview I	Microwave	does	not a	assume	any	liability
arising ou	t of the us	e of any	part or do	ocument	ation.									





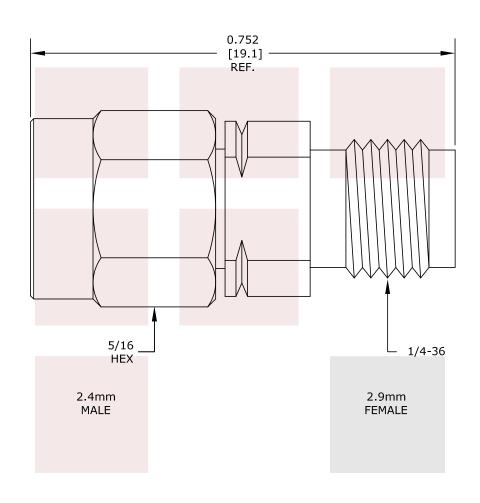

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].				Y TIME.		
2.92mm Female to 2.4mm Male Adapter	DWG NO FMAD1027				CAGE CODE 3FKR5		
	CAD FILE 020515	SHEET	SCALE	≣ N/A	SIZE A	150	