

FMAD1006 DATA SHEET

SMA Female to SMP Male Full Detent Adapter

SMA female to SMP male full detent adapter part number FMAD1006 from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMP adapter has a female to male gender configuration. FMAD1006 SMA female to SMP male adapter operates to 18 GHz. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. The Fairview Microwave RF adapter provides good VSWR of 1.3:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connnector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		18	GHz
VSWR			1.3:1	
Operating Voltage (AC)			335	Vrms
DWV (AC)			500	Vrms

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size Length Width	0.91 in [23.11 mm] 0.35 in [8.89 mm]			
Weight	0.011 lbs [4.99 g]			
Description	Connector 1	Connector 2		
Туре	SMA Female	SMP Male		
Connection Method		Full Detent		
Polarity	Standard	Standard		
Interface Specification	MIL-STD-348A	MIL-STD-348A		

Material Specifications

Connector 1	Connector 2		
SMA Female	SMP Male		
Beryllium Copper	Beryllium Copper		
Gold	Gold		
0.3 µm minimum	0.3 µm minimum		
PTFE	PTFE		
Passivated Stainless Steel			
	Passivated Stainless Steel		
	SMA Female Beryllium Copper Gold 0.3 µm minimum PTFE		



Configuration:

- SMA Female Connector 1
- Full Detent SMP Male Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.3:1 max up to 18 GHz
- SMA interface meets MIL-STD-348A
- SMP interface meets MIL-STD-348A
- 0.3 µm minimum contact plating
- Gold Plated Beryllium Copper Contact

Applications:

- Enables Between Series
 Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Environmental Specifications

Temperature Operating Range

-45 to +120 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data



SMA Female to SMP Male Full Detent Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: SMA Female to SMP Male Full Detent Adapter FMAD1006

URL: https://www.fairviewmicrowave.com/sma-female-smp-male-full-detent-adapter-fmad1006-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





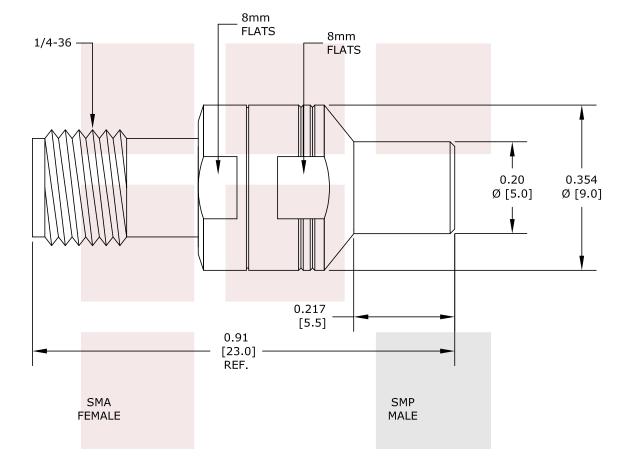

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
TITLE SMA Female to SMP Male Full Detent Adapter	DWG NO FMAD1006			CAGE CODE 3FKR5		
	CAD FILE 100814	SHEET	SCAL	E N/A	SIZE A	150

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689