

DP 340

DP Range: 9 kHz - 250 MHz / 340 W CW



Prana DP 340

- Class A solid state
- Broadband (instantaneous single band): 9 kHz – 250 MHz
- Frequency extension between 4 kHz and 9 kHz upon request
- Typical output power : 340 W CW
- Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
 - P1dB >225 W and H<-20dBc at 9 kHz
 - P1dB >280 W and H<-20dBc from 10 kHz to 20 kHz
 - P1dB >300 W and H<-20dBc from 20 kHz to 50 MHz
 - P1dB >225 W and H<-20dBc from 50 MHz to 250 MHz
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Reliable, efficient and robust
- 19" Rack
- 3 years standard warranty

Maintenance

- Amplifier designed for minimal maintenance
 - Easy access to all parts
 - Modular design
 - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions

- DP 340 S : standard amplifier
- DP 340 D amplifier with:
 - Multicolor LCD display with touch panel
 - Digital control
 - IEEE 488 GPIB, Ethernet, USB, RS232 Communications
 - Temperature controlled fans
 - Safety interlock
- DP 340 SC : DP 340 S with
 - Integrated dual directional coupler
- DP 340 DC : DP 340 D with :
 - Integrated dual directional coupler
 - display of instantaneous incident and reflected power

DP Range

- DP 90 => 90 W CW
- DP 180 => 180 W CW
- DP 340 => 340 W CW
- DP 670 => 670 W CW
- DP 1350 => 1350 W CW
- DP 2500 => 2500 W CW
- DP 5000 => 5000 W CW
- DP 10000 => 10000 W CW
- DP 16000 => 16000 W CW

Extra

- External coupler
- Supply and integration inside a cabinet
- Bulk Current Injection + Calibration JIG
- RF Power cable
- Switching unit

4TECT

OOO «4TECT»


Телефон: +7 (499) 685-4444

info@4test.ru

www.4test.ru

DP 340

DP Range: 9 kHz - 250 MHz / 340 W CW

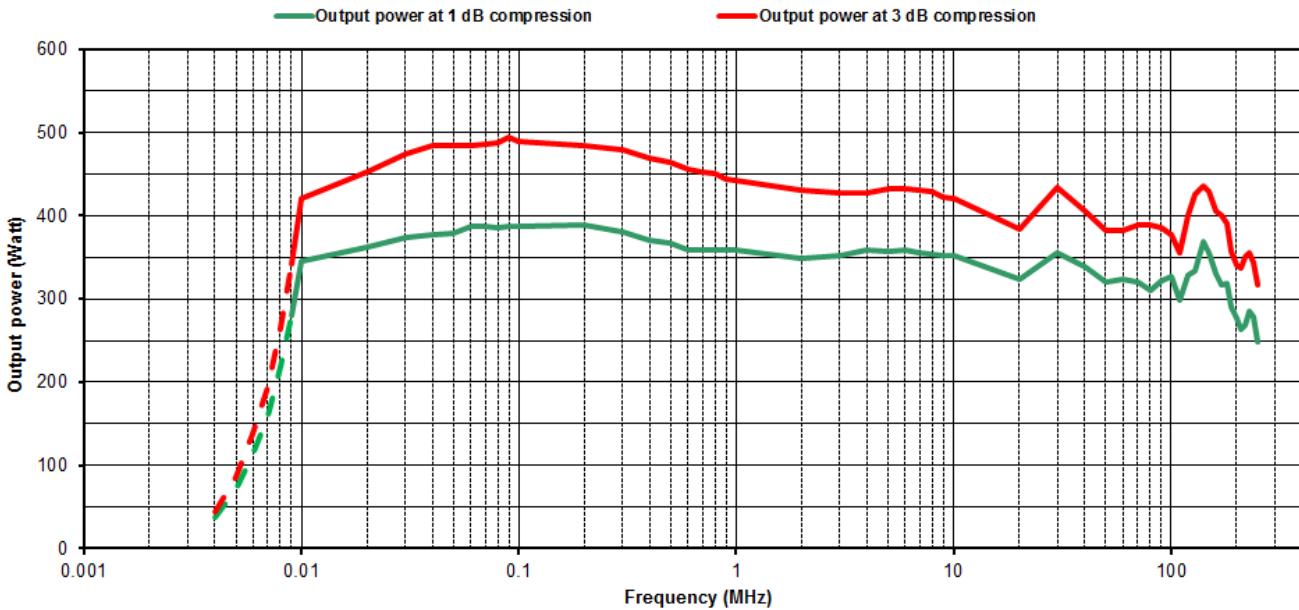

Specifications

Frequency bandwidth	9 kHz - 250 MHz
Typical output power	340 W
Power at 3 dB compression	300W min 9kHz/ 330W min 10-20kHz/ 350W min 20kHz-50MHz/ 300W min 50-250MHz
Power at 1 dB compression	225W min 9kHz/ 280W min 10-20kHz/ 300W min 20kHz-50MHz/ 225W min 50-250MHz
Harmonics distortion	H2,H3 < -20 dBc for the output power at 1 dB compression limit
Class type	Class A
Gain	53 dB
Linear power gain flatness	± 3 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1 max
Output impedance	50 ohms / VSWR: 2:1 max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type N fem. (front or rear panel) – other connector type on request
Ambient operating temperature	0 °C / + 35 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air with fan speed control (for D version): 60 l/sec max. (self contained fans)
Power voltage	90-250 VAC, 47-63 Hz, single phase
Rated current	12.3 A at 110 VAC / 5.9 A at 230 VAC
Dimensions	640 x 450 x 178 mm (4U) / 25.2 x 17.7 x 7 in (4U)
Weight	28 kg / 67 lb

DP 340 D version :

Safety interlock	Connector type BNC
Digital control	Transistors, power supplies, temperatures and fans
Communication interface	Ethernet, USB, GPIB, RS232
Color LCD Display with touch screen	Status, faults, (direct and reverse instantaneous power for DC version))

DP 340 SC and DP 340 DC versions :

Integrated bidirectional power coupler	Coupling factor 40 dB typ. (SC version) / 49 dB typ. (DC version)
Power coupling connector	Type N fem. (front or rear panel)
Estimated output power losses due to the coupler	0.3 dB



OOO «4TECT»
Телефон: +7 (499) 685-4444
info@4test.ru
www.4test.ru