

## 500W – Coaxial Termination

### Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.

### RF Characteristics

Model Number	Freq. Range	Power	VSWR Max	Connector Type	Impedance
LBWCT500AN3	DC-3GHz	500W	1.3	N Male	50 Ω
LBWCT500ANF3		500W	1.3	N Female	50 Ω
LBWCT500AD3		500W	1.3	7/16 Male	50 Ω
LBWCT500ADF3		500W	1.3	7/16 Female	50 Ω

- List are specify frequency range and other ranges available.
- Please enter below information when inquiry and mark \* is must.
  - \* 1. Power handling, Attenuation Value
  - 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
  - 3. Other special request if have (VSWR, Temperature, Dimension, etc.)

### Mechanical Drawing

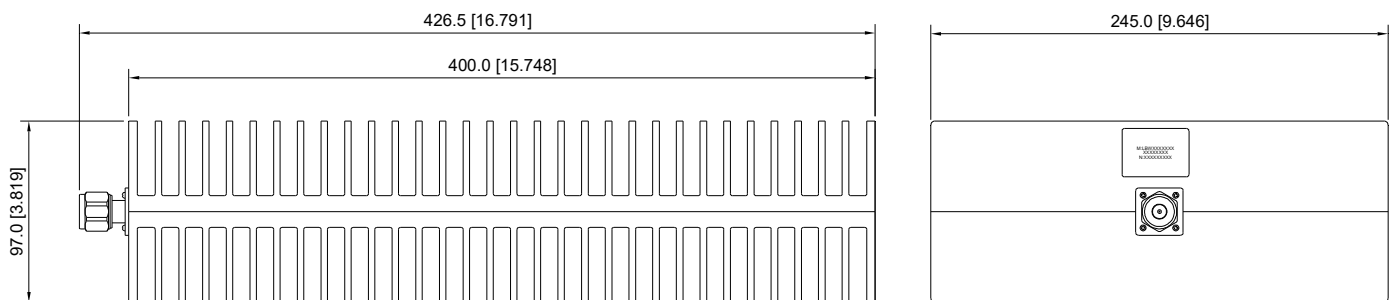

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5.2