

M9410A and M9411A VXT PXle Vector Transceivers

1 MHz to 6 GHz



4TECT

ООО «4TECT»

Телефон: +7 (499) 685-4444

info@4test.ru

www.4test.ru

 **KEYSIGHT**
TECHNOLOGIES

Table of Contents

Technical Specifications.....	3
Vector Signal Analyzer.....	4
Vector Signal Generator.....	10
General Specifications	18
Front Panel.....	19
MIMO Timing Synchronization Specifications.....	19
Spectrum Analyzer Measurement Application Key Specifications	20
Analog Demodulation Measurement Application Key Specifications	22
Analog Modulation Source Key Specifications	24
Noise figure measurement application key specifications	25
GSM/EDGE/Evo measurement application key specifications	26
GSM/EDGE/Evo source key specifications	26
W-CDMA/HSPA+ Measurement Application Key Specifications	27
W-CDMA/HSPA+ Source Key Specifications	27
LTE/LTE-Advanced FDD & LTE/LTE-Advanced TDD Measurement Application Specifications.....	28
LTE Source Key Specifications.....	30
WLAN Measurement Application Key Specifications	32
WLAN Source Key Specifications	33
5G NR Measurement Application Specifications	34
5G NR Source Key Specifications	35
Related Literature.....	37
Web	37

Technical Specifications

Definitions and conditions

- **Specifications** describe the warranted performance of calibrated instruments. Data represented in this document are specifications under the following conditions unless otherwise noted.
- Specifications are valid from 45 to 75 °C for individual module temperature, as reported by the module, and 20 to 35 °C for environment temperature unless otherwise noted
- Calibrated instrument has been stored for a minimum of 2 hours within the allowed operating range
- If instrument has previously been stored at a temperature range inside the allowed storage range, but outside the allowed operating range, instrument must have been stored for a minimum of 2 hours within the allowed operating range before turn-on
- 45-minute warm-up time with the Modular TRX application running
- Calibration cycle maintained
- When used with Keysight M9300A frequency reference and Keysight interconnect cables
- An “All Alignment” has been run within the previous 7 days
- A “Fast Alignment” has been run:
 - Within the previous 8 hours
 - If the environmental temperature has changed more than 5°C from the previous Fast Alignment

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 95 percent of the units exhibit with a 95 percent confidence level. This data does not include measurement uncertainty and is valid only at room temperature (approximately 25 °C) after alignment within the stated alignment time and temperature limits.

Nominal values indicate expected performance or describe product performance that is useful in the application of the product but are not covered by the product warranty.

Recommended best practices in use

- Use slot blockers and EMC filler panels in empty module slots to ensure proper operating temperatures. Keysight chassis and slot blockers optimize module temperature performance and reliability of test.
- Set chassis fan to high at environmental temperatures above 35 °C.

Vector Signal Analyzer

Performance			
Capture depth			
Standard (Option M02)	256 MSa of IQ data		
Option M05	512 MSa of IQ data		
Frequency range			
Standard (Option F06)	380 MHz to 6 GHz		
Option M9411A-LFE	1 to 380 MHz		
Frequency reference			
Accuracy, aging rate, stability	Refer to M9300A specifications		
Frequency Readout Accuracy			
CW	\pm (marker frequency \times frequency reference accuracy + 0.10% \times span + 5% \times RBW + 2 Hz + 0.5 \times horizontal resolution)		
Demodulation	\pm (center frequency \times frequency reference accuracy + 1 Hz)		
Resolution	1 Hz		
Maximum signal analysis bandwidth			
	Center frequency	Serial prefix < MY6020	Serial prefix \geq MY6020, with Opt. EP6
Standard (Option B3X)	380 to 550 MHz	100 MHz	100 MHz
	550 to 1310 MHz	200 MHz	200 MHz
	1310 to 5930 MHz	300 MHz	300 MHz
	5930 to 6000 MHz	(6080 MHz – center frequency) \times 2	300 MHz
Option B6X	380 to 550 MHz	100 MHz	100 MHz
	550 to 1310 MHz	200 MHz	200 MHz
	1310 to 5780 MHz	600 MHz	600 MHz
	5780 to 6000 MHz	(6080 MHz – center frequency) \times 2	600 MHz
Option B12	380 to 550 MHz	100 MHz	100 MHz
	550 to 1310 MHz	200 MHz	200 MHz
	1310 to 1900 MHz	600 MHz	600 MHz
	1900 to 2000 MHz	600 MHz	1200 MHz
	2000 to 5480 MHz	1200 MHz	1200 MHz
	5480 to 6000 MHz	(6080 MHz – center frequency) \times 2	1200 MHz
Triggering			
Trigger			
IQ analyzer	Free run, External 1, External 2, RF burst, Video, Periodic, PXI, Internal		
Trigger delay range	–150 to 500 ms		
Resolution	1/sample rate		

Maximum safe input level						
Average power input						
RF input port	+27 dBm					
Option HDX, Half duplex port	+27 dBm					
DC volts						
RF input port	30 Vdc					
Option HDX, Half duplex port	30 Vdc					
Absolute Amplitude Accuracy (CW mode)						
Serial prefix < MY6020 ¹						
RF input port						
Frequency range	–70 dBm ≤ Input level < –30 dBm	–30 dBm ≤ Input level ≤ –8 dBm	–8 dBm < Input level ≤ +27 dBm			
380 to 680 MHz	< ± 0.45 dB <i>< ± 0.20 dB typical</i>	< ± 0.45 dB <i>< ± 0.20 dB typical</i>	< ± 0.45 dB <i>< ± 0.20 dB typical</i>			
680 to 910 MHz	< ± 0.45 dB <i>< ± 0.25 dB typical</i>	< ± 0.45 dB <i>< ± 0.20 dB typical</i>	< ± 0.50 dB <i>< ± 0.25 dB typical</i>			
910 to 1310 MHz	< ± 0.55 dB <i>< ± 0.30 dB typical</i>	< ± 0.55 dB <i>< ± 0.30 dB typical</i>	< ± 0.60 dB <i>< ± 0.35 dB typical</i>			
1310 to 2000 MHz	< ± 0.60 dB <i>< ± 0.35 dB typical</i>	< ± 0.65 dB <i>< ± 0.35 dB typical</i>	< ± 0.65 dB <i>< ± 0.35 dB typical</i>			
2000 to 3500 MHz	< ± 0.70 dB <i>< ± 0.40 dB typical</i>	< ± 0.80 dB <i>< ± 0.45 dB typical</i>	< ± 0.60 dB <i>< ± 0.30 dB typical</i>			
3500 to 4500 MHz	< ± 0.65 dB <i>< ± 0.35 dB typical</i>	< ± 0.70 dB <i>< ± 0.35 dB typical</i>	< ± 0.75 dB <i>< ± 0.35 dB typical</i>			
4500 to 5400 MHz	< ± 0.90 dB <i>< ± 0.45 dB typical</i>	< ± 0.95 dB <i>< ± 0.45 dB typical</i>	< ± 0.85 dB <i>< ± 0.45 dB typical</i>			
5400 to 6000 MHz	< ± 1.20 dB <i>< ± 0.60 dB typical</i>	< ± 1.15 dB <i>< ± 0.60 dB typical</i>	< ± 1.05 dB <i>< ± 0.55 dB typical</i>			
Half duplex port, Option HDX						
Frequency range	–70 dBm ≤ Input level < –30 dBm	–30 dBm ≤ Input level ≤ –8 dBm	–8 dBm < Input level ≤ +27 dBm			
380 to 910 MHz	< ± 0.50 dB <i>< ± 0.25 dB typical</i>	< ± 0.35 dB <i>< ± 0.20 dB typical</i>	< ± 0.45 dB <i>< ± 0.25 dB typical</i>			
910 to 1310 MHz	< ± 0.60 dB <i>< ± 0.35 dB typical</i>	< ± 0.45 dB <i>< ± 0.25 dB typical</i>	< ± 0.55 dB <i>< ± 0.30 dB typical</i>			
1310 to 3500 MHz	< ± 0.75 dB <i>< ± 0.40 dB typical</i>	< ± 0.70 dB <i>< ± 0.35 dB typical</i>	< ± 0.65 dB <i>< ± 0.30 dB typical</i>			
3500 to 4500 MHz	< ± 0.95 dB <i>< ± 0.50 dB typical</i>	< ± 0.80 dB <i>< ± 0.40 dB typical</i>	< ± 0.80 dB <i>< ± 0.35 dB typical</i>			
4500 to 5400 MHz	< ± 1.15 dB <i>< ± 0.65 dB typical</i>	< ± 0.95 dB <i>< ± 0.50 dB typical</i>	< ± 1.00 dB <i>< ± 0.55 dB typical</i>			
5400 to 6000 MHz	< ± 1.35 dB <i>< ± 0.75 dB typical</i>	< ± 1.10 dB <i>< ± 0.55 dB typical</i>	< ± 1.05 dB <i>< ± 0.55 dB typical</i>			

1. Signal is measured at 100 kHz offset from the center frequency, Otherwise, an IF flatness error must be added.

Serial prefix ≥ MY6020, with Opt. EP6¹

RF input port, Half duplex port (Option HDX)

Frequency range	–70 dBm ≤ Input level < –30 dBm	–30 dBm ≤ Input level ≤ +27 dBm
1 to 10 MHz	< ± 0.15 dB typical	< ± 0.15 dB typical
10 to 150 MHz	< ± 0.95 dB, < ± 0.40 dB typical	< ± 0.40 dB, < ± 0.15 dB typical
150 to 380 MHz	< ± 0.70 dB, < ± 0.25 dB typical	< ± 0.45 dB, < ± 0.15 dB typical
Frequency range	–70 dBm ≤ Input level ≤ +27 dBm	
380 to 680 MHz	< ± 0.45 dB, < ± 0.20 dB typical	
680 to 1900 MHz	< ± 0.60 dB, < ± 0.30 dB typical	
1900 to 2700 MHz	< ± 0.70 dB, < ± 0.30 dB typical	
2700 to 4700 MHz	< ± 0.85 dB, < ± 0.40 dB typical	
4700 to 5200 MHz	< ± 0.80 dB, < ± 0.35 dB typical	
5200 to 6000 MHz	< ± 0.85 dB, < ± 0.45 dB typical	

Input Voltage Standing Wave Ratio (VSWR)

Serial prefix < MY6020	RF input port, nominal	Half Duplex Port, nominal
380 to 1310 MHz	< 1.7:1	< 1.4:1
1310 to 2000 MHz	< 1.8:1	< 1.4:1
2000 to 3500 MHz	< 1.6:1	< 1.4:1
3500 to 4500 MHz	< 1.7:1	< 1.7:1
4500 to 5200 MHz	< 1.7:1	< 1.6:1
5200 to 6000 MHz	< 2.1:1	< 1.6:1
Serial prefix ≥ MY6020, with Opt. EP6	RF input port	Half Duplex Port
1 to 380 MHz	< 2.8:1, < 2.5:1 typical	< 2.4:1, < 2.2:1 typical
380 to 1310 MHz	< 1.9:1, < 1.7:1 typical	< 1.6:1, < 1.5:1 typical
1310 to 2000 MHz	< 1.7:1, < 1.5:1 typical	< 1.5:1, < 1.4:1 typical
2000 to 3500 MHz	< 2.0:1, < 1.8:1 typical	< 1.7:1, < 1.5:1 typical
3500 to 4500 MHz	< 1.9:1, < 1.7:1 typical	< 1.8:1, < 1.6:1 typical
4500 to 5200 MHz	< 1.6:1, < 1.4:1 typical	< 1.6:1, < 1.4:1 typical
5200 to 6000 MHz	< 2.0:1, < 1.7:1 typical	< 2.1:1, < 1.8:1 typical

Phase Noise Sidebands (CF = 1 GHz)

Frequency offset	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6 Used with M9300A or M9300A-S01
1 kHz	–110 dBc/Hz, typical ²	–100 dBc/Hz, –110 dBc/Hz typical
10 kHz	–129 dBc/Hz, typical ²	–123 dBc/Hz, –129 dBc/Hz typical
100 kHz	–132 dBc/Hz, typical ²	–126 dBc/Hz, –132 dBc/Hz typical
1 MHz	–134 dBc/Hz, typical ²	–129 dBc/Hz, –134 dBc/Hz typical
5 MHz	–137 dBc/Hz, typical ²	–133 dBc/Hz, –137 dBc/Hz typical

1. Signal is measured at 1.1 MHz offset from the center frequency, Otherwise, an IF flatness error must be added.
2. nominal, when used with M9300A-S01

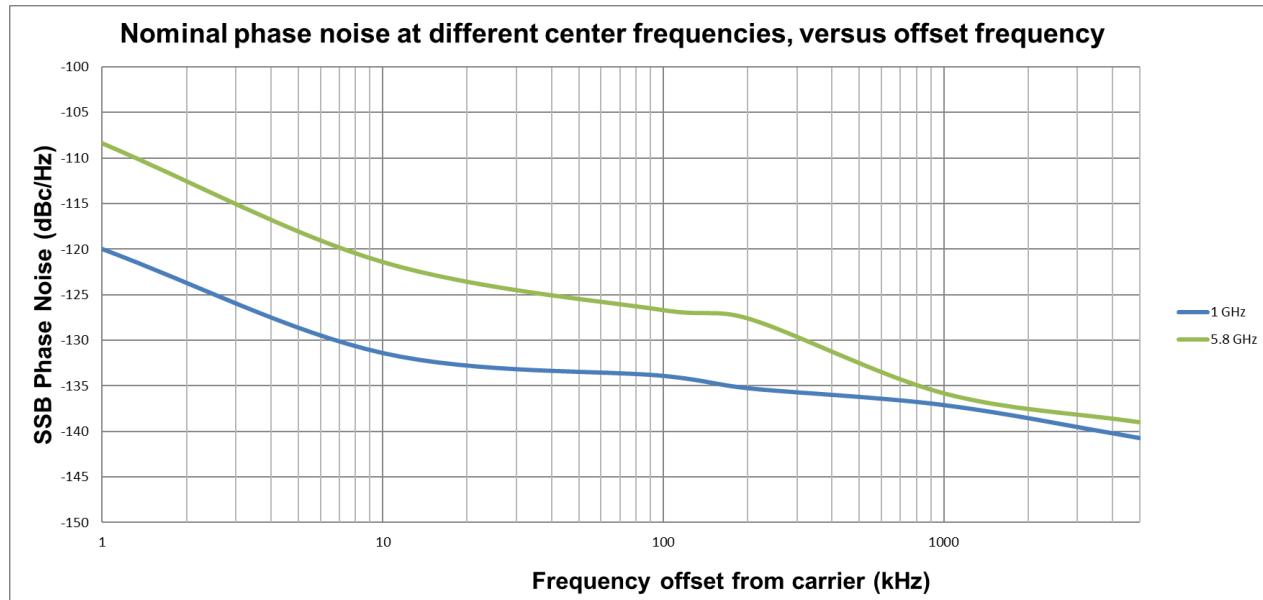


Figure 1. Nominal phase noise from 1 kHz to 5 MHz offset at 1 and 5.8 GHz

Residual responses		
RF input port; Option HDX, half duplex port; with analyzer ranged to 0 dBm		
Serial prefix < MY6020		
1 to 380 MHz	< -81 dBm typical	
380 to 6000 MHz	< -81 dBm typical, offset from 10 MHz to $\frac{1}{2} \times$ analysis bandwidth	
Serial prefix ≥ MY6020, with Opt. EP6		
1 to 380 MHz	< -75 dBm, < -81 dBm typical	
380 to 6000 MHz	< -75 dBm, < -81 dBm typical, offset from 10 MHz to $\frac{1}{2} \times$ analysis bandwidth	
Image responses, typical		
Maximum bandwidth	Center frequency	Serial prefix < MY6020
100 MHz	380 to 550 MHz	-57 dBc
200 MHz	550 to 1310 MHz	-59 dBc
300 MHz	1310 to 5930 MHz	-56 dBc ¹
600 MHz	1310 to 5780 MHz	-48 dBc
1200 MHz	2000 to 5480 MHz	-49 dBc

1. -50 dBc for frequencies from 5100 to 5930 MHz.

Maximum bandwidth	Center frequency	Serial prefix \geq MY6020, with Opt. EP6
100 MHz	380 to 460 MHz	-53 dBc
	460 to 550 MHz	-57 dBc
200 MHz	550 to 650 MHz	-60 dBc
	650 to 1310 MHz	-63 dBc ¹
300 MHz	1310 to 6000 MHz	-55 dBc
600 MHz	1310 to 6000 MHz	-54 dBc
1200 MHz	1900 to 6000 MHz	-54 dBc

Sideband spurs, nominal		
Frequency range	Offset	
1 to 10 MHz	1 to 250 kHz	-85 dBc
10 to 20 MHz	1 kHz to 2.5 MHz	-85 dBc
20 to 60 MHz	1 kHz to 5 MHz	-85 dBc
60 to 6000 MHz	1 kHz to 10 MHz	-85 dBc
LO Feedthrough (dBr ²)		
Serial prefix < MY6020	RF input port, with analyzer ranged from -10 to +27 dBm	Option HDX, half duplex port, with analyzer ranged from 0 to +27 dBm
380 to 450 MHz	-58 dBr, typical	-58 dBr, typical
450 to 550 MHz	-56 dBr, typical	-53 dBr, typical
550 to 680 MHz	-53 dBr, typical	-54 dBr, typical
680 to 910 MHz	-55 dBr, typical	-57 dBr, typical
910 to 1310 MHz	-53 dBr, typical	-55 dBr, typical
1310 to 2000 MHz	-52 dBr, typical	-53 dBr, typical
2000 to 3500 MHz	-50 dBr, typical	-49 dBr, typical
3500 to 4500 MHz	-50 dBr, typical	-52 dBr, typical
4500 to 5100 MHz	-47 dBr, typical	-45 dBr, typical
5100 to 6000 MHz	-44 dBr, typical	-42 dBr, typical
Serial prefix \geq MY6020, with Opt. EP6	RF input port, with analyzer ranged from -10 to +27 dBm	Option HDX, half duplex port, with analyzer ranged from 0 to +27 dBm
380 to 450 MHz	-35 dBr, -46 dBr typical	-35 dBr, -46 dBr typical
450 to 4600 MHz	-41 dBr, -53 dBr typical	-41 dBr, -53 dBr typical
4600 to 6000 MHz	-41 dBr, -51 dBr typical	-41 dBr, -51 dBr typical

1. -57 dBc for frequencies from 1300 to 1310 MHz.

2. dBr is LO feedthrough power relative to the range level of the receiver.

Displayed Average Noise Floor (DANL) ¹		
Serial prefix < MY6020		
Frequency range	RF input port, with analyzer ranged to -70 dBm	Half duplex port, Option HDX, with analyzer ranged to -70 dBm
380 to 680 MHz	-157 dBm/Hz, -160 dBm/Hz typical	-151 dBm/Hz, -154 dBm/Hz typical
680 to 910 MHz	-160 dBm/Hz, -163 dBm/Hz typical	-154 dBm/Hz, -157 dBm/Hz typical
910 to 1310 MHz	-156 dBm/Hz, -159 dBm/Hz typical	-151 dBm/Hz, -154 dBm/Hz typical
1310 to 2000 MHz	-162 dBm/Hz, -165 dBm/Hz typical	-156 dBm/Hz, -159 dBm/Hz typical
2000 to 3500 MHz	-158 dBm/Hz, -162 dBm/Hz typical	-153 dBm/Hz, -156 dBm/Hz typical
3500 to 4500 MHz	-158 dBm/Hz, -162 dBm/Hz typical	-151 dBm/Hz, -154 dBm/Hz typical
4500 to 6000 MHz	-152 dBm/Hz, -155 dBm/Hz typical	-145 dBm/Hz, -148 dBm/Hz typical
Serial prefix \geq MY6020, with Opt. EP6		
Frequency range	RF input port, with analyzer ranged to -70 dBm	Half duplex port, Option HDX, with analyzer ranged to -70 dBm
1 to 10 MHz	-157 dBm/Hz, -162 dBm/Hz typical	-156 dBm/Hz, -161 dBm/Hz typical
10 to 380 MHz	-160 dBm/Hz, -164 dBm/Hz typical	-158 dBm/Hz, -163 dBm/Hz typical
380 to 680 MHz	-159 dBm/Hz, -162 dBm/Hz typical	-157 dBm/Hz, -160 dBm/Hz typical
680 to 1310 MHz	-160 dBm/Hz, -163 dBm/Hz typical	-158 dBm/Hz, -161 dBm/Hz typical
1310 to 2000 MHz	-162 dBm/Hz, -166 dBm/Hz typical	-161 dBm/Hz, -164 dBm/Hz typical
2000 to 3500 MHz	-161 dBm/Hz, -164 dBm/Hz typical	-158 dBm/Hz, -161 dBm/Hz typical
3500 to 4500 MHz	-160 dBm/Hz, -163 dBm/Hz typical	-157 dBm/Hz, -160 dBm/Hz typical
4500 to 6000 MHz	-158 dBm/Hz, -161 dBm/Hz typical	-154 dBm/Hz, -157 dBm/Hz typical
Third-order Intermodulation Distortion (TOI, with analyzer ranged to 0 dBm)		
Serial prefix < MY6020		
380 to 4000 MHz	+27 dBm, nominal	
4000 to 6000 MHz	+23 dBm, nominal	
Serial prefix \geq MY6020, with Opt. EP6		
10 to 380 MHz	+19 dBm, +22 dBm typical	
380 to 4000 MHz	+19 dBm, +25 dBm typical	
4000 to 6000 MHz	+17dBm, +21 dBm typical	
IF Flatness		
Maximum bandwidth	Serial prefix < MY6020	Serial prefix \geq MY6020, with Opt. EP6
100 MHz	± 1.10 dB, ± 0.80 dB typical	± 0.75 dB, ± 0.40 dB typical
200 MHz	± 1.35 dB, ± 1.00 dB typical	± 0.80 dB, ± 0.40 dB typical
300 MHz	± 1.25 dB, ± 0.90 dB typical	± 0.80 dB, ± 0.45 dB typical
600 MHz	± 1.45 dB, ± 0.90 dB typical	± 1.20 dB, ± 0.70 dB typical
1200 MHz	± 1.80 dB, ± 1.00 dB typical	± 1.20 dB, ± 0.70 dB typical

1. Input terminated, log power average, and normalized to 1 Hz bandwidth.

Vector Signal Generator

Performance						
Arb sample memory (storage capacity)						
Standard (Option M02)	256 MSa of IQ data					
Option M05	512 MSa of IQ data					
Maximum signal generation bandwidth						
	Center frequency	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6			
Standard (Option B3X)	380 to 550 MHz	100 MHz	100 MHz			
	550 to 1310 MHz	200 MHz	200 MHz			
	1310 to 5930 MHz	300 MHz	300 MHz			
	5930 to 6000 MHz	(6080 MHz – center frequency) × 2	300 MHz			
Option B6X	380 to 550 MHz	100 MHz	100 MHz			
	550 to 1310 MHz	200 MHz	200 MHz			
	1310 to 5780 MHz	600 MHz	600 MHz			
	5780 to 6000 MHz	(6080 MHz – center frequency) × 2	600 MHz			
Option B12	380 to 550 MHz	100 MHz	100 MHz			
	550 to 1310 MHz	200 MHz	200 MHz			
	1310 to 1900 MHz	600 MHz	600 MHz			
	1900 to 2000 MHz	600 MHz	1200 MHz			
	2000 to 5480 MHz	1200 MHz	1200 MHz			
	5480 to 6000 MHz	(6080 MHz – center frequency) × 2	1200 MHz			
Frequency range						
Standard (Option F06)	380 MHz to 6 GHz					
Option M9411A-LFE	1 to 380 MHz					
Frequency reference						
Accuracy, aging rate, stability	Refer to M9300A specifications					
Frequency accuracy						
± (output frequency × frequency reference accuracy + 0.001 Hz)						
Frequency switching speed ¹						
SCPI mode	≤ 14 ms nominal					
IVI mode	≤ 10 ms nominal					

1. Switching speed depends highly upon the hardware and controller that is used. Measurements were made with the M9410A in an M9018B chassis with the M9037A embedded controller, Windows 10 Operating System.

Output level range (CW mode)	
RF output port	
1 to 20 MHz	-120 to 0 dBm
20 MHz to 6 GHz	-120 to +5 dBm
Option HDX, half duplex port (configured to output mode)	
380 MHz to 6 GHz	-120 to +5 dBm
RF output port, Option 1EA	
60 MHz to 6 GHz	-120 to +20 dBm, +25 dBm settable
Maximum reverse power	
Average power input	+27 dBm
DC volts	30 Vdc
Amplitude Switching Speed ¹	
SCPI mode	≤ 14 ms nominal
IVI mode	≤ 10 ms nominal

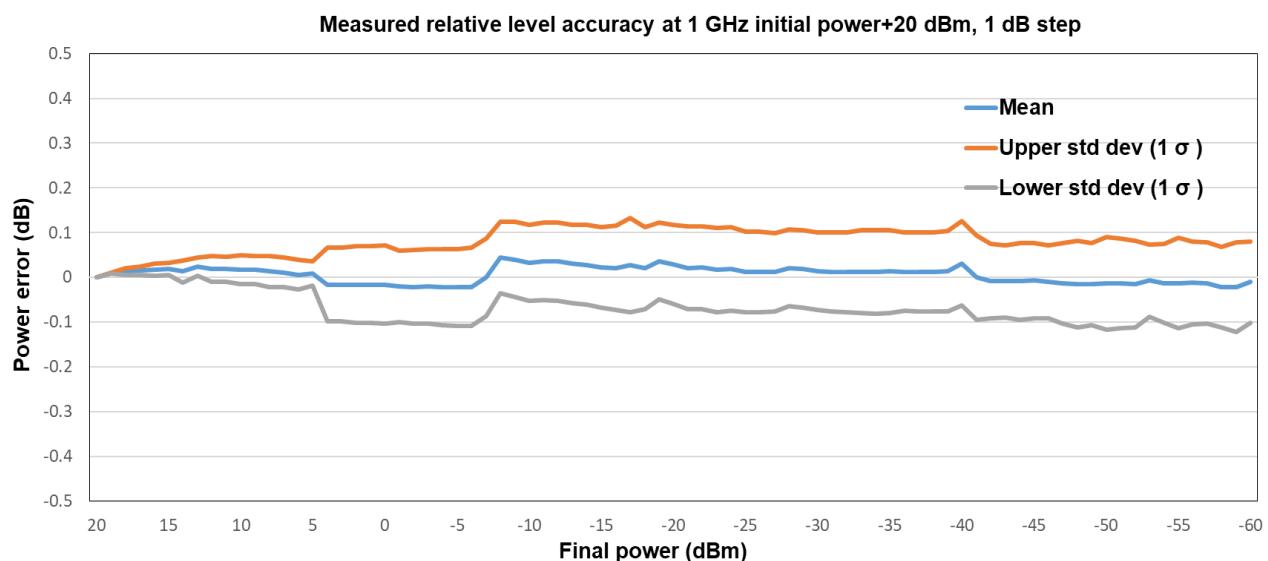


Figure 2. Measured relative level accuracy at 1 GHz

1. Switching speed depends highly upon the hardware and controller that is used. Measurements were made with the M9410A in an M9018B chassis with the M9037A embedded controller, Windows 10 Operating System.

Absolute Level Accuracy (CW mode)		
RF output port		
1 to 20 MHz		
Level ≤ 0 dBm to –15 dBm		
Level ≤ 0 dBm to –15 dBm	< ± 0.70 dB <i>typical</i>	
Level ≤ –15 dBm to –80 dBm	< ± 0.50 dB <i>typical</i>	
Level ≤ –80 dBm to –120 dBm	< ± 0.50 dB <i>typical</i>	
20 to 60 MHz		
Level ≤ +5 dBm to –15 dBm	< ± 0.40 dB, < ± 0.25 dB <i>typical</i>	
Level ≤ –15 dBm to –80 dBm	< ± 0.55 dB, < ± 0.35 dB <i>typical</i>	
Level ≤ –80 dBm to –120 dBm	< ± 0.55 dB, < ± 0.35 dB <i>typical</i>	
60 to 380 MHz		
Level ≤ +20 dBm to –15 dBm	< ± 0.45 dB, < ± 0.25 dB <i>typical</i>	
Level ≤ –15 dBm to –80 dBm	< ± 0.50 dB, < ± 0.30 dB <i>typical</i>	
Level ≤ –80 dBm to –120 dBm	< ± 0.55 dB, < ± 0.30 dB <i>typical</i>	
380 to 550 MHz		Serial prefix < MY6020, with Opt. EP6
Level ≤ +20 dBm to –15 dBm	< ± 0.60 dB, < ± 0.35 dB <i>typical</i>	< ± 0.60 dB, < ± 0.25 dB <i>typical</i>
Level ≤ –15 dBm to –80 dBm	< ± 0.70 dB, < ± 0.35 dB <i>typical</i>	< ± 0.70 dB, < ± 0.30 dB <i>typical</i>
Level ≤ –80 dBm to –120 dBm	< ± 0.80 dB, < ± 0.40 dB <i>typical</i>	< ± 0.80 dB, < ± 0.40 dB <i>typical</i>
550 to 2000 MHz		Serial prefix ≥ MY6020, with Opt. EP6
Level ≤ +20 dBm to –15 dBm	< ± 0.70 dB, < ± 0.40 dB <i>typical</i>	< ± 0.60 dB, < ± 0.30 dB <i>typical</i>
Level ≤ –15 dBm to –80 dBm	< ± 0.70 dB, < ± 0.40 dB <i>typical</i>	< ± 0.70 dB, < ± 0.35 dB <i>typical</i>
Level ≤ –80 dBm to –110 dBm	< ± 0.85 dB, < ± 0.50 dB <i>typical</i>	< ± 0.75 dB, < ± 0.35 dB <i>typical</i>
2000 to 3900 MHz		Serial prefix < MY6020, with Opt. EP6
Level ≤ +20 dBm to –15 dBm	< ± 0.60 dB, < ± 0.35 dB <i>typical</i>	< ± 0.60 dB, < ± 0.30 dB <i>typical</i>
Level ≤ –15 dBm to –80 dBm	< ± 0.80 dB, < ± 0.45 dB <i>typical</i>	< ± 0.80 dB, < ± 0.40 dB <i>typical</i>
Level ≤ –80 dBm to –110 dBm	< ± 1.30 dB, < ± 0.75 dB <i>typical</i>	< ± 1.00 dB, < ± 0.50 dB <i>typical</i>
3900 to 5700 MHz		Serial prefix ≥ MY6020, with Opt. EP6
Level ≤ +20 dBm to –15 dBm	< ± 0.80 dB, < ± 0.40 dB <i>typical</i>	< ± 0.70 dB, < ± 0.35 dB <i>typical</i>
Level ≤ –15 dBm to –80 dBm	< ± 1.10 dB, < ± 0.60 dB <i>typical</i>	< ± 1.10 dB, < ± 0.55 dB <i>typical</i>
Level ≤ –80 dBm to –100 dBm	< ± 1.20 dB, < ± 0.65 dB <i>typical</i>	< ± 1.20 dB, < ± 0.55 dB <i>typical</i>
5700 to 6000 MHz		Serial prefix < MY6020, with Opt. EP6
Level ≤ +20 dBm to –15 dBm	< ± 0.80 dB, < ± 0.40 dB <i>typical</i>	< ± 0.70 dB, < ± 0.35 dB <i>typical</i>
Level ≤ –15 dBm to –80 dBm	< ± 1.10 dB, < ± 0.60 dB <i>typical</i>	< ± 1.10 dB, < ± 0.55 dB <i>typical</i>
Level ≤ –80 dBm to –90 dBm	< ± 1.20 dB, < ± 0.65 dB <i>typical</i>	< ± 1.20 dB, < ± 0.55 dB <i>typical</i>
Level ≤ –90 dBm to –100 dBm		< ± 1.20 dB, < ± 0.55 dB <i>typical</i>

Option HDX, half duplex port		
380 to 550 MHz	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
Level ≤ +5 dBm to −15 dBm	< ± 0.50 dB, < ± 0.30 dB <i>typical</i>	< ± 0.50 dB, < ± 0.25 dB <i>typical</i>
Level ≤ −15 dBm to −80 dBm	< ± 0.75 dB, < ± 0.35 dB <i>typical</i>	< ± 0.75 dB, < ± 0.35 dB <i>typical</i>
Level ≤ −80 dBm to −90 dBm	< ± 0.75 dB, < ± 0.45 dB <i>typical</i>	< ± 0.75 dB, < ± 0.35 dB <i>typical</i>
Level ≤ −90 dBm to −110 dBm		< ± 0.75 dB, < ± 0.35 dB <i>typical</i>
550 to 2000 MHz	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
Level ≤ +5 dBm to −15 dBm	< ± 0.55 dB, < ± 0.35 dB <i>typical</i>	< ± 0.55 dB, < ± 0.25 dB <i>typical</i>
Level ≤ −15 dBm to −80 dBm	< ± 0.70 dB, < ± 0.45 dB <i>typical</i>	< ± 0.70 dB, < ± 0.35 dB <i>typical</i>
Level ≤ −80 dBm to −90 dBm	< ± 0.80 dB, < ± 0.55 dB <i>typical</i>	< ± 0.80 dB, < ± 0.40 dB <i>typical</i>
Level ≤ −90 dBm to −110 dBm		< ± 0.80 dB, < ± 0.40 dB <i>typical</i>
2000 to 3900 MHz	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
Level ≤ +5 dBm to −15 dBm	< ± 0.50 dB, < ± 0.30 dB <i>typical</i>	< ± 0.60 dB, < ± 0.30 dB <i>typical</i>
Level ≤ −15 dBm to −80 dBm	< ± 0.80 dB, < ± 0.55 dB <i>typical</i>	< ± 0.80 dB, < ± 0.45 dB <i>typical</i>
Level ≤ −80 dBm to −90 dBm	< ± 1.10 dB, < ± 0.75 dB <i>typical</i>	< ± 0.90 dB, < ± 0.50 dB <i>typical</i>
Level ≤ −90 dBm to −100 dBm		< ± 0.90 dB, < ± 0.50 dB <i>typical</i>
3900 to 6000 MHz	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
Level ≤ +5 dBm to −15 dBm	< ± 0.90 dB, < ± 0.55 dB <i>typical</i>	< ± 0.80 dB, < ± 0.45 dB <i>typical</i>
Level ≤ −15 dBm to −80 dBm	< ± 1.25 dB, < ± 0.80 dB <i>typical</i>	< ± 1.15 dB, < ± 0.65 dB <i>typical</i>
Level ≤ −80 dBm to −90 dBm		< ± 1.35 dB, < ± 0.70 dB <i>typical</i>
Measured Amplitude Repeatability		
RF output port, 0 dBm output power, 1 GHz, 24 hours elapsed time without alignment, 25 °C		
Delta from initial value	< ± 0.10 dB nominal	
Setting Resolution		
0.01 dB		
Output Voltage Standing Wave Ratio (VSWR)		
RF output port		
	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
1 to 380 MHz		< 1.9:1, < 1.7:1 <i>typical</i>
380 to 4200 MHz	< 1.7:1 <i>typical</i> , < 1.6:1 nominal	< 1.8:1, < 1.6:1 <i>typical</i>
4200 to 5000 MHz	< 1.8:1 <i>typical</i> , < 1.7:1 nominal	< 1.7:1, < 1.6:1 <i>typical</i>
5000 to 6000 MHz	< 1.8:1 <i>typical</i> , < 1.7:1 nominal	< 1.9:1, < 1.7:1 <i>typical</i>
Option HDX, half duplex port (configured to output mode)		
	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
380 to 4000 MHz	< 1.7:1 nominal	< 1.8:1, < 1.6:1 <i>typical</i>
4000 to 5000 MHz	< 2.1:1 nominal	< 1.8:1, < 1.6:1 <i>typical</i>
5000 to 6000 MHz	< 2.4:1 nominal	< 2.3:1, < 2.0:1 <i>typical</i>

Harmonics		
RF output port		
0 dBm output power	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
1 to 10 MHz	< -36 dBc typical	< -32 dBc, < -36 dBc typical
10 to 380 MHz	< -42 dBc typical	< -38 dBc, < -42 dBc typical
380 to 6000 MHz	< -44 dBc typical	< -39 dBc, < -44 dBc typical
+10 dBm output power, with Option 1EA	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
60 to 380 MHz	< -38 dBc typical	< -35 dBc, < -38 dBc typical
380 to 6000 MHz	< -35 dBc typical	< -32 dBc, < -35 dBc typical
Option HDX, half duplex port		
0 dBm output power	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
380 to 6000 MHz	< -42 dBc typical	< -42 dBc, < -45 dBc typical
Non-harmonic Spurious (CW mode)		
RF output port		
0 dBm output power	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
10 to 380 MHz		< -50 dBc, < -60 dBc typical
380 to 6000 MHz	< -65 dBc typical	< -65 dBc, < -75 dBc typical
+10 dBm output power, with Option 1EA	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
60 to 380 MHz		< -50 dBc, < -60 dBc typical
380 to 6000 MHz	< -65 dBc typical	< -65 dBc, < -75 dBc typical
Option HDX, half duplex port		
0 dBm output power	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
380 to 3900 MHz	< -65 dBc typical	< -65 dBc, < -75 dBc typical
3900 to 6000 MHz	< -63 dBc typical	< -65 dBc, < -75 dBc typical
LO Feedthrough		
RF output port		
0 dBm output power	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
380 to 3000 MHz	-65 dBc nominal	< -43 dBc, < -55 dBc typical
3000 to 5000 MHz	-55 dBc nominal	< -40 dBc, < -50 dBc typical
5000 to 6000 MHz	-50 dBc nominal	< -35 dBc, < -45 dBc typical

Image Responses		
RF output port, -10 dBm output power		
Maximum bandwidth	Center frequency	Serial prefix < MY6020
100 MHz	380 to 550 MHz	-55 dBc nominal
200 MHz	550 to 1310 MHz	-55 dBc nominal
300 MHz	1310 to 5930 MHz	-50 dBc nominal
600 MHz	1310 to 5780 MHz	-50 dBc nominal
1200 MHz	2000 to 5480 MHz	-50 dBc nominal
Maximum bandwidth	Center frequency	Serial prefix ≥ MY6020, with Opt. EP6
100 MHz	380 to 550 MHz	-50 dBc, -55 dBc <i>typical</i>
200 MHz	550 to 1310 MHz	-50 dBc, -55 dBc <i>typical</i>
300 MHz	1310 to 6000 MHz	-45 dBc, -50 dBc <i>typical</i>
600 MHz	1310 to 6000 MHz	-40 dBc, -47 dBc <i>typical</i>
1200 MHz	1900 to 6000 MHz	-40 dBc, -45 dBc <i>typical</i>
Sideband Spurious		
RF output port, 0 dBm; Option HDX, half duplex port, 0 dBm; Option 1EA, +10 dBm		
Serial prefix < MY6020		
Offset		380 to 6000 MHz
1 to 100 kHz		-75 dBc nominal
100 kHz to 1 MHz		-80 dBc nominal
1 to 10 MHz		-80 dBc nominal
Serial prefix ≥ MY6020, with Opt. EP6		
Offset	20 to 380 MHz	380 to 6000 MHz
1 to 100 kHz	-65 dBc, -75 dBc <i>typical</i>	-65 dBc, -80 dBc <i>typical</i>
100 kHz to 10 MHz	-65 dBc, -75 dBc <i>typical</i>	-70 dBc, -80 dBc <i>typical</i>
Phase Noise		
RF output port, 0 dBm; Option HDX, half duplex port, 0 dBm; Option 1EA, +10 dBm; Center frequency = 1 GHz		
Frequency offset	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6 Used with M9300A or M9300A-S01
1 kHz	-113 dBc/Hz, <i>typical</i>	-105 dBc/Hz, -113 dBc/Hz <i>typical</i>
10 kHz	-130 dBc/Hz, <i>typical</i>	-124 dBc/Hz, -130 dBc/Hz <i>typical</i>
100 kHz	-137 dBc/Hz, <i>typical</i>	-133 dBc/Hz, -137 dBc/Hz <i>typical</i>
1 MHz	-140 dBc/Hz, <i>typical</i>	-137 dBc/Hz, -140 dBc/Hz <i>typical</i>
5 MHz	-139 dBc/Hz, <i>typical</i>	-137 dBc/Hz, -139 dBc/Hz <i>typical</i>

Nominal phase noise at different center frequencies, versus offset frequency

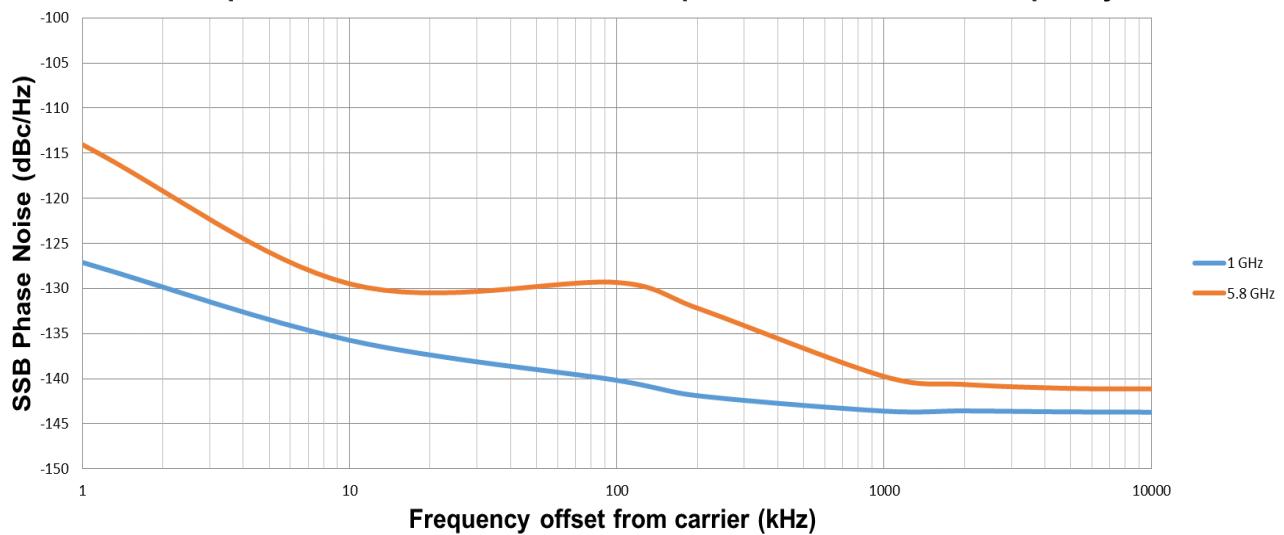


Figure 3. Nominal phase noise from 1 kHz to 10 MHz offset at 1 and 5.8 GHz

Broadband Noise Floor ¹		
RF output port, output level = 0 dBm		
Frequency range	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
20 to 380 MHz		-129 dBm/Hz, -132 dBm/Hz typical
380 to 550 MHz	-136 dBm/Hz, nominal	-132 dBm/Hz, -135 dBm/Hz typical
550 to 1000 MHz	-140 dBm/Hz, nominal	-134 dBm/Hz, -136 dBm/Hz typical
1000 to 4500 MHz	-141 dBm/Hz, nominal	-134 dBm/Hz, -138 dBm/Hz typical
4500 to 6000 MHz	-137 dBm/Hz, nominal	-134 dBm/Hz, -137 dBm/Hz typical
Option HDX, half duplex port, output level = -10 dBm		
Frequency range	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
380 to 550 MHz	-146 dBm/Hz, nominal	-141 dBm/Hz, -144 dBm/Hz typical
550 to 1000 MHz	-149 dBm/Hz, nominal	-143 dBm/Hz, -145 dBm/Hz typical
1000 to 4500 MHz	-147 dBm/Hz, nominal	-143 dBm/Hz, -146 dBm/Hz typical
4500 to 6000 MHz	-145 dBm/Hz, nominal	-143 dBm/Hz, -146 dBm/Hz typical
Third-order Intermodulation Distortion (TOI)		
RF output port, output level = 0 dBm		
	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
1 to 20 MHz	+13 dBm typical	+12 dBm, +13 dBm typical
20 to 380 MHz	+19 dBm typical	+17 dBm, +19 dBm typical
380 to 3900 MHz	+28 dBm typical	+26 dBm, +28 dBm typical
3900 to 4500 MHz	+27 dBm typical	+26 dBm, +27 dBm typical
4500 to 6000 MHz	+25 dBm typical	+22 dBm, +25 dBm typical

1. Measured at 13.1 MHz offset from the center frequency.

Option HDX, half duplex port, output level = -10 dBm			
	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6	
380 to 4500 MHz	+18 dBm typical	+16 dBm, +18 dBm typical	
4500 to 6000 MHz	+15 dBm typical	+12 dBm, +15 dBm typical	
IF Flatness			
RF output port, Option HDX, half duplex port, output level = -10 dBm			
Maximum amplitude error			
Maximum bandwidth	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6	
20 MHz	± 0.24 dB typical ¹	± 0.40 dB, ± 0.26 dB typical	
100 MHz	± 0.50 dB typical	± 0.65 dB, ± 0.39 dB typical	
200 MHz	± 0.80 dB typical	± 0.80 dB, ± 0.45 dB typical	
300 MHz	± 1.00 dB typical	± 0.95 dB, ± 0.60 dB typical	
600 MHz	± 1.00 dB typical	± 1.45 dB, ± 0.80 dB typical	
1200 MHz	± 1.50 dB typical	± 1.80 dB, ± 1.00 dB typical	
Maximum phase error			
Serial prefix ≥ MY6020, with Opt. EP6			
Frequency	Maximum bandwidth	Peak-to-peak (nominal)	RMS (nominal)
1000 MHz	100 MHz	1.5°	0.3°
4000 MHz	100 MHz	1.0°	0.3°
	300 MHz	2.2°	0.6°
	600 MHz	5.9°	1.3°
	1200 MHz	14.1°	3.4°
5000 MHz	100 MHz	1.5°	0.4°
	300 MHz	6.2°	2.0°
	600 MHz	11.2°	3.5°
	1200 MHz	14.8°	4.2°

1. The value is typical for RF output port, or nominal for half duplex port.

General Specifications

Environmental Characteristic	
Operating temperature	+5 to +45 °C
Storage temperature	-40 to +65 °C
EMC	<p>Complies with European EMC Directive 2014/30/EU</p> <ul style="list-style-type: none"> • IEC/EN 61326-1 • CISPR 11, Group 1, Class A • AS/NZS CISPR 11 • ICES/NMB-001 <p>This ISM device complies with Canadian ICES-001 Cet appareil ISM est conforme à la norme NMB-001 du Canada</p>
Environmental stress	
<p>Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MILPRF-28800F Class 3.</p>	
Maximum Power Consumption	
M9410A	88 W nominal
M9411A	114 W nominal
Weight	
Net	
M9410A	1.2 kg (2.6 lbs)
M9411A	1.5 kg (3.3 lbs)
Dimension	
M9410A (H x W x D)	130.1 mm x 40.6 mm x 210 mm
M9411A (H x W x D)	130.1 mm x 60.9 mm x 210 mm
Calibration Cycle	
The recommended calibration cycle is one year; calibration services are available through Keysight service centers	

Front Panel

Reference	
100 MHz In, 100 MHz Out	Connector: MMPX female, 50 Ω nominal
	Lock range: ± 1 ppm, nominal
	Input amplitude: > +10 dBm, nominal
	Output amplitude: > +10 dBm, nominal
LO Reference	
4.8 GHz In, 4.8 GHz Out	Connector: MMPX female, 50 Ω nominal
	Input amplitude: > +10 dBm, nominal
	Output amplitude: > +12 dBm, nominal
RF Connections	
RF Input	Connector: SMA female, 50 Ω nominal
RF Output	Connector: SMA female, 50 Ω nominal
Half Duplex	Connector: SMA female, 50 Ω nominal
Trigger Connections	
Trigger 1, Trigger 2 (Input/Output, selectable)	Connector: MMPX female
	Input impedance: 1 kΩ or 50 Ω nominal
	Input level range: 0 to +3.3 V
	Output impedance: 50 Ω nominal
	Output level range: 3.3 V LVTTL
DIO Connections	
Ctrl M, Ctrl S	Connector: Micro-HDMI female
	Level range: 3.3 V LVTTL, LVDS

MIMO Timing Synchronization Specifications

Channel to Channel Timing Synchronization, Option MMO, nominal		
	Signal analyzer	Signal generator
Timing skew	≤ 200 ps	≤ 200 ps
Timing jitter ¹	≤ 50 ps	≤ 50 ps
Repeatability ²	≤ 50 ps	≤ 50 ps

1. Jitter indicates measurement-to-measurement variation and applies over short time interval at room temperature without resetting or reinitializing a driver session.
2. Repeatability indicates stability of alignment between channels across power cycles and IVI sessions, with identical cabling and hardware settings (frequency, span, sample rate, etc.)

Spectrum Analyzer Measurement Application Key Specifications

Absolute Amplitude Accuracy (CW mode) ¹				
RF input port, input level from -70 dBm to +27 dBm				
Frequency range	Serial prefix < MY6020			
380 to 660 MHz	< ± 0.75 dB, < ± 0.30 dB typical			
660 to 720 MHz	< ± 0.80 dB, < ± 0.45 dB typical			
720 to 1900 MHz	< ± 0.85 dB, < ± 0.35 dB typical			
1900 to 4770 MHz	< ± 1.05 dB, < ± 0.65 dB typical			
4770 to 4950 MHz	< ± 1.30 dB, < ± 0.70 dB typical			
4950 to 6000 MHz	< ± 1.10 dB, < ± 0.60 dB typical			
Frequency range	Serial prefix ≥ MY6020, with Opt. EP6			
380 to 410 MHz	< ± 0.75 dB, < ± 0.45 dB typical			
410 to 1900 MHz	< ± 0.70 dB, < ± 0.30 dB typical			
1900 to 3550 MHz	< ± 0.95 dB, < ± 0.50 dB typical			
3550 to 3950 MHz	< ± 1.05 dB, < ± 0.70 dB typical			
3950 to 4500 MHz	< ± 1.05 dB, < ± 0.65 dB typical			
4500 to 4570 MHz	< ± 1.20 dB, < ± 0.70 dB typical			
4570 to 5320 MHz	< ± 0.90 dB, < ± 0.50 dB typical			
5320 to 5660 MHz	< ± 1.10 dB, < ± 0.60 dB typical			
5660 to 6000 MHz	< ± 0.95 dB, < ± 0.50 dB typical			
Input Voltage Standing Wave Ratio (VSWR), typical				
RF input port				
	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6		
380 to 1310 MHz	< 1.8:1, < 1.7:1 nominal	< 1.9:1, < 1.7:1 typical		
1310 to 2000 MHz	< 1.6:1, < 1.5:1 nominal	< 1.6:1, < 1.4:1 typical		
2000 to 3500 MHz	< 1.8:1, < 1.7:1 nominal	< 1.9:1, < 1.6:1 typical		
3500 to 4500 MHz	< 1.6:1, < 1.5:1 nominal	< 1.8:1, < 1.6:1 typical		
4500 to 5200 MHz	< 2.0:1, < 1.8:1 nominal	< 1.7:1, < 1.4:1 typical		
5200 to 6000 MHz	< 2.3:1, < 2.0:1 nominal	< 2.0:1, < 1.7:1 typical		
Phase Noise Sidebands (CF = 1 GHz)				
	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6; Used with M9300A or M9300A-S01		
1 kHz offset	-121 dBc/Hz nominal	-104 dBc/Hz, -113 dBc/Hz typical		
10 kHz offset	-133 dBc/Hz nominal	-125 dBc/Hz, -131 dBc/Hz typical		
100 kHz offset	-135 dBc/Hz nominal	-130 dBc/Hz, -135 dBc/Hz typical		
1 MHz offset	-137 dBc/Hz nominal	-131 dBc/Hz, -136 dBc/Hz typical		
5 MHz offset	-140 dBc/Hz nominal	-135 dBc/Hz, -139 dBc/Hz typical		

1. Signal at the center frequency, in 40 MHz span (380 to 550 MHz) or 80 MHz span (550 to 6000 MHz). Otherwise, an additional ± 0.6 dB nominal IF flatness error must be added.

Spurious Responses				
Residual responses				
RF input port; with analyzer ranged to 0 dBm				
	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6		
380 to 550 MHz, 40 MHz span	< -90 dBm nominal	< -90 dBm, < -95 dBm typical		
550 to 6000 MHz, 80 MHz span	< -90 dBm nominal	< -90 dBm, < -95 dBm typical		
Input related spurs, nominal				
RF input port; input CW signal within span, with analyzer ranged to 0 dBm				
380 to 550 MHz, 40 MHz span	< -76 dBc			
550 to 6000 MHz, 80 MHz span	< -76 dBc			
Sideband spurs, nominal				
1 kHz to 10 MHz offset	< -80 dBc			
Displayed Average Noise Floor (DANL) ¹				
RF input port, with analyzer ranged to -70 dBm				
Frequency range	Serial prefix < MY6020			
380 to 1320 MHz	-155 dBm/Hz, -160 dBm/Hz typical			
1320 to 2540 MHz	-153 dBm/Hz, -158 dBm/Hz typical			
2540 to 3070 MHz	-152 dBm/Hz, -157 dBm/Hz typical			
3070 to 3570 MHz	-153 dBm/Hz, -157 dBm/Hz typical			
3570 to 5200 MHz	-152 dBm/Hz, -156 dBm/Hz typical			
5200 to 5750 MHz	-150 dBm/Hz, -154 dBm/Hz typical			
5750 to 6000 MHz	-146 dBm/Hz, -152 dBm/Hz typical			
Frequency range	Serial prefix ≥ MY6020, with Opt. EP6			
380 to 1900 MHz	-156 dBm/Hz, -160 dBm/Hz typical			
1900 to 5200 MHz	-152 dBm/Hz, -157 dBm/Hz typical			
5200 to 6000 MHz	-151 dBm/Hz, -156 dBm/Hz typical			
Third-order Intermodulation Distortion (TOI)				
RF input port, with analyzer ranged to 0 dBm				
	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6		
380 to 4000 MHz	+27 dBm nominal	+24 dBm, +28 dBm typical		
4000 to 6000 MHz	+23 dBm nominal	+18 dBm, +22 dBm typical		
1 dB Gain Compression Point, nominal				
RF input port, two-tone with 100 kHz spacing, with analyzer ranged to 0 dBm				
380 to 6000 MHz	+2 dBm			
Display Scale Fidelity, typical				
RF input port, relative to 0 dBm input level, with analyzer ranged to 0 dBm				
-80 dBm ≤ input level ≤ 0 dBm	±0.07 dB			

1. Input terminated, log power average, SW preselection off, and normalized to 1 Hz bandwidth.

Analog Demodulation Measurement Application Key Specifications

Frequency modulation	
FM deviation	Peak deviation ¹ 200 Hz to 400 kHz
Deviation accuracy ²	$\pm(0.01 \times \text{reading} + 0.002 \times \text{Rate}) [\text{Hz}]$
FM rate	20 Hz to 50 kHz
Channel BW	$\leq 1 \text{ MHz}$
Rate accuracy ³	
10 to 1310 MHz	$\pm((8 \times 10^{-6}/\text{ModIndex} + 2 \times 10^{-6}) \times \text{Reading}) + rfa [\text{Hz}]$
1310 to 3000 MHz	$\pm((1.5 \times 10^{-5}/\text{ModIndex} + 3 \times 10^{-6}) \times \text{Reading}) + rfa [\text{Hz}]$
Residual distortion ^{4,5}	
10 to 380 MHz	$0.8/(\text{ModIndex})^{\frac{1}{2}} + 0.1 [\%]$
380 to 1310 MHz	$1.7/(\text{ModIndex})^{\frac{1}{2}} + 0.1 [\%]$
1310 to 3000 MHz	$1.0/(\text{ModIndex})^{\frac{1}{2}} + 0.1 [\%]$
Distortion Accuracy ⁶	
Distortion (SINAD) and THD	$\pm(0.02 \times \text{reading} + \text{DistResidual}) [\%]$
Amplitude modulation	
AM depth	1% to 99%
Depth accuracy ²	
10 to 380 MHz	$\pm(0.004 \times \text{reading} + 0.02) [\%]$
380 to 1310 MHz	$\pm(0.007 \times \text{reading} + 0.02) [\%]$
1310 to 3000 MHz	$\pm(0.005 \times \text{reading} + 0.02) [\%]$
AM rate	50 Hz to 100 kHz
Channel BW	5 times of rate
Rate accuracy ³	$\pm((0.8 \times 10^{-6} \times \text{reading}) \times (100\%/\text{Depth}) + rfa [\text{Hz}]$
Residual distortion ⁴	
10 to 380 MHz	$0.03 \times (100\%/\text{Depth}) + 0.02 [\%]$
380 to 3000 MHz	$0.03 \times (100\%/\text{Depth}) + 0.01 [\%]$
Phase modulation	
PM deviation	Peak deviation 0.2 to 100 rad
Deviation accuracy ²	$\pm(0.001 \times \text{reading} + 0.007) [\text{rad}], \text{rate} \geq 100 \text{ Hz}$
PM rate	50 Hz to 50 kHz
Channel BW	$\leq 1 \text{ MHz}$

1. Peak deviation, modulation index ("beta"), and modulation rate are related by Peak Deviation = Modulation Index \times Rate.
Beta: 0.2 to 2000

2. This specification applies to the result labeled "(Pk-Pk)/2".

3. rfa = Modulation Rate \times frequency reference accuracy.

4. SINAD [dB] can be derived by $20 \times \log_{10}(1/\text{Distortion})$. SINAD bandwidth: (Channel BW)/2.

5. 10 to 1310 MHz, 1 kHz rate, 1 kHz deviation, residual distortion < 0.11%

6. 2nd and 3rd harmonics, Rate: 1 to 10 kHz, ModIndex: 0.2 to 100

Rate accuracy ¹	
10 to 1310 MHz	
Rate ≤ 500 Hz	$\pm(0.0005/\text{Deviation}) + rfa \text{ [Hz]}$
Rate > 500 Hz	$\pm(0.008/\text{Deviation}) + rfa \text{ [Hz]}$
1310 to 3000 MHz	
Rate ≤ 500 Hz	$\pm(0.0015/\text{Deviation}) + rfa \text{ [Hz]}$
Rate > 500 Hz	$\pm(0.01/\text{Deviation}) + rfa \text{ [Hz]}$
Residual distortion ²	
10 to 380 MHz	$0.4/\text{Deviation} + 0.01 \text{ [%]}$
380 to 1310 MHz	$0.7/\text{Deviation} + 0.01 \text{ [%]}$
1310 to 3000 MHz	$0.4/\text{Deviation} + 0.01 \text{ [%]}$

1. rfa = Modulation Rate × frequency reference accuracy.

2. SINAD [dB] can be derived by $20 \times \log_{10}(1/\text{Distortion})$. SINAD bandwidth: (Channel BW)/2.

Analog Modulation Source Key Specifications

Frequency modulation	
Deviation accuracy, 1 kHz rate, 1 to 100 kHz deviation, 0 dBm output power	
1 to 3000 MHz	< 1.3%
Residual distortion, 1 kHz rate, 5 to 100 kHz deviation, 0 dBm output power	
1 to 3000 MHz	< 0.6%
FM residual, 15 kHz channel bandwidth	
1 to 3000 MHz	< 4 Hz
Amplitude modulation	
Depth error, 1 kHz rate, 30% to 95% depth	
1 to 30 MHz, -10 dBm output power	< 2.6%
30 to 60 MHz, -5 dBm output power	< 1.1%
60 to 3000 MHz, 0 dBm output power	< 1.4%
Residual distortion, 1 kHz rate	
1 to 30 MHz, -10 dBm output power	
30% depth	< 1.0%
50% depth	< 1.0%
90% depth	< 1.3%
30 to 60 MHz, -5 dBm output power	
30% depth	< 0.6%
50% depth	< 0.5%
90% depth	< 0.5%
60 to 3000 MHz, 0 dBm output power	
30% depth	< 0.7%
50% depth	< 0.7%
90% depth	< 0.9%
Phase modulation	
Deviation accuracy, 1 kHz rate, rad \geq 0.5, 0 dBm output power	
1 to 3000 MHz	< 1.2%
Residual distortion, 1 kHz rate, rad \geq 1, 0 dBm output power	
1 to 3000 MHz	< 0.2% typical

Noise figure measurement application key specifications ¹

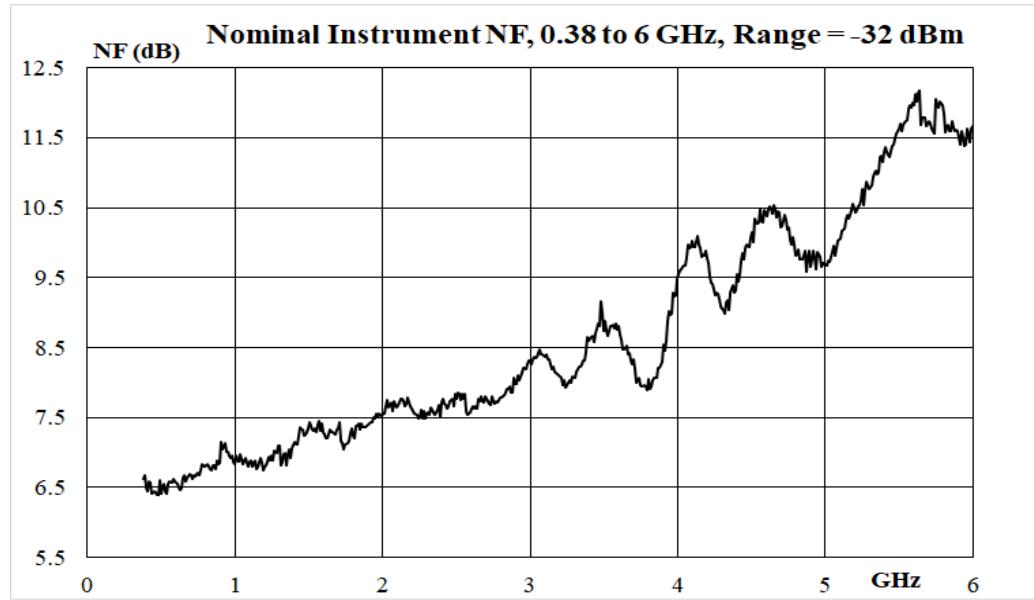


Figure 4. Nominal instrument noise figure

1. For M9411A with serial prefix \geq MY6020, with Opt. EP6.

GSM/EDGE/Evo measurement application key specifications ¹

Power versus time (PvT)	
Absolute power accuracy	± 0.49 dB nominal at 0 dBm input power
Phase error (GMSK modulation)	
Average floor	0.30° nominal at 0 dBm input power
Peak floor	0.85° nominal at 0 dBm input power
EDGE error vector magnitude (EVM)	
RMS floor	0.65% nominal at 0 dBm input power
Peak floor	2.0% nominal at 0 dBm input power
Output RF spectrum (ORFS for GMSK and 8PSk modulation)	
Residual relative power, spectrum due to modulation	
Offset frequency	
600 kHz	-75 dBc nominal at 0 dBm input power
1.2 MHz	-77 dBc nominal at 0 dBm input power
1.8 MHz	-74 dBc nominal at 0 dBm input power
Residual relative power, spectrum due to switching	
Offset frequency	
600 kHz	-72 dBc nominal at 0 dBm input power
1.2 MHz	-74 dBc nominal at 0 dBm input power
1.8 MHz	-75 dBc nominal at 0 dBm input power

GSM/EDGE/Evo source key specifications ²

Signal quality (RF output port, Half duplex port: 0 dBm)		
Phase error (GMSK)		
RMS	< 0.3° nominal	
Peak	< 2.0° nominal	
EVM (EDGE)		
RMS	< 1% nominal	
Output RF spectrum (ORFS)		
Residual relative power, spectrum due to modulation		
Offset	GSM, nominal Half duplex/RF output (0 dBm)	EDGE, nominal Half duplex/RF output (0 dBm)
200 kHz	-35 dBc	-36 dBc
400 kHz	-68 dBc	-68 dBc
600 kHz	-76 dBc	-76 dBc
1200 kHz	-80 dBc	-80 dBc
1800 kHz	-76 dBc	-76 dBc

1. For frequencies from 450 to 490 MHz, 820 to 920 MHz, and 1710 to 1910 MHz.

2. For frequencies from 380 to 490 MHz, 695 to 960 MHz, and 1425 to 2180 MHz.

W-CDMA/HSPA+ Measurement Application Key Specifications ¹

Channel power				
	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6		
Absolute power accuracy	±0.48 dB nominal at 0 dBm input power	±0.40 dB nominal at 0 dBm input power		
QPSK EVM				
	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6		
Residual EVM	0.90% nominal at –10 dBm input power	0.70% nominal at –10 dBm input power		
Adjacent channel power ratio (ACPR)				
Residual relative power in 3.84 MHz BW				
5 MHz offsets	–65 dBc nominal at 0 dBm input power			
Spectrum emission mask (SEM)				
Residual relative power (offset)				
Downlink, nominal				
2.515 to 2.715 MHz	–75 dBc in a 30 kHz BW at 0 dBm input power			
2.715 to 3.515 MHz	–77 dBc in a 1 MHz BW at 0 dBm input power			
3.515 to 4 MHz	–77 dBc in a 1 MHz BW at 0 dBm input power			
4 to 8 MHz	–67 dBc in a 1 MHz BW at 0 dBm input power			
8 to 12.5 MHz	–66 dBc in a 1 MHz BW at 0 dBm input power			
Uplink, nominal				
2.515 to 3.485 MHz	–80 dBc in a 30 kHz BW at 0 dBm input power			
4 to 7.5 MHz	–65 dBc in a 1 MHz BW at 0 dBm input power			
7.5 to 8.5 MHz	–70 dBc in a 1 MHz BW at 0 dBm input power			
8.5 to 12 MHz	–70 dBc in a 1 MHz BW at 0 dBm input power			

W-CDMA/HSPA+ Source Key Specifications

Error vector magnitude (EVM) ¹			
Composite EVM, RF output port, half duplex port, at 0 dBm output power			
RMS	< 1% nominal		
Adjacent channel leakage ratio (ACLR), RF Output Port, Half Duplex Port, at 0 dBm Output Power, nominal			
Offset	Configuration	Frequency (MHz)	ACLR
Adjacent 5 MHz	1 DPCCH 1 carrier	900	–70 dB
Adjacent 10 MHz		1800 to 2000	–71 dB
Adjacent 5 MHz		1800 to 2000	–70 dB
Adjacent 10 MHz		1800 to 2000	–72 dB
Adjacent 5 MHz	64 DPCCH 1 carrier	900	–69 dB
Adjacent 10 MHz		1800 to 2000	–70 dB
Adjacent 5 MHz		1800 to 2000	–67 dB
Adjacent 10 MHz		1800 to 2000	–71 dB

1. For frequencies from 695 MHz to 920 MHz and from 1425 MHz to 2700 MHz.

LTE/LTE-Advanced FDD & LTE/LTE-Advanced TDD Measurement Application Specifications¹

Transmit power									
		Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6						
Absolute power accuracy		±0.65 dB nominal at 0 dBm input power	±0.52 dB nominal at 0 dBm input power						
Error vector magnitude (EVM)									
Residual EVM									
20 MHz bandwidth		< 0.4% nominal at -10 dBm input power							
Serial prefix ≥ MY6020, with Opt. EP6, at -10 dBm or 0 dBm input power									
900 MHz	5 MHz bandwidth	0.17% downlink, 0.17% uplink							
	20 MHz bandwidth	0.22% downlink, 0.26% uplink							
2000 MHz	5 MHz bandwidth	0.25% downlink, 0.24% uplink							
	20 MHz bandwidth	0.29% downlink, 0.31% uplink							
Adjacent channel power									
RF input port; Option HDX, half duplex port; at -20 dBm input power									
		RF input port, nominal		Half duplex port, nominal					
		Serial prefix < MY6020	Serial prefix ≥ MY6020	Serial prefix < MY6020					
E-UTRA (Uplink and downlink)	695 to 910 MHz	-58 dBc	-57 dBc	-57 dBc					
	910 to 1310 MHz	-55 dBc	-60 dBc	-54 dBc					
	1310 to 2350 MHz	-60 dBc	-60 dBc	-60 dBc					
	2350 to 3800 MHz	-60 dBc	-60 dBc	-56 dBc					
UTRA (Uplink and downlink)	695 to 3800 MHz	-60 dBc	-62 dBc	-60 dBc					
Serial prefix ≥ MY6020, with Opt. EP6, at -10 dBm or 0 dBm input power, typical									
E-UTRA (Uplink and downlink)	900 MHz, 2000 MHz	5 MHz bandwidth, 20 MHz bandwidth		-61 dBc					
UTRA (Uplink and downlink)	900 MHz, 2000 MHz	5 MHz bandwidth, 20 MHz bandwidth		-66 dBc					

1. For frequencies from 695 and 3800 MHz.

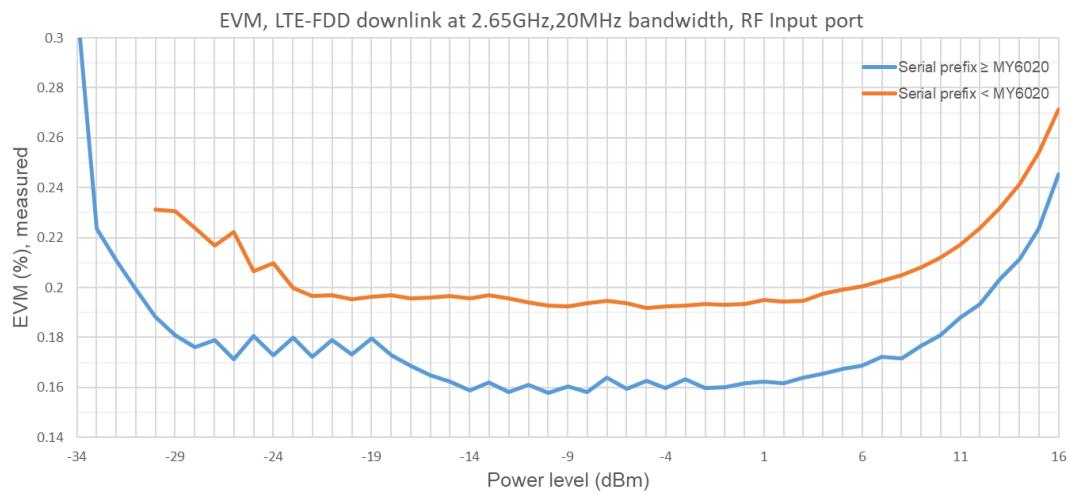


Figure 5. LTE-FDD downlink EVM vs. input power level at 2.65 GHz with 20 MHz bandwidth

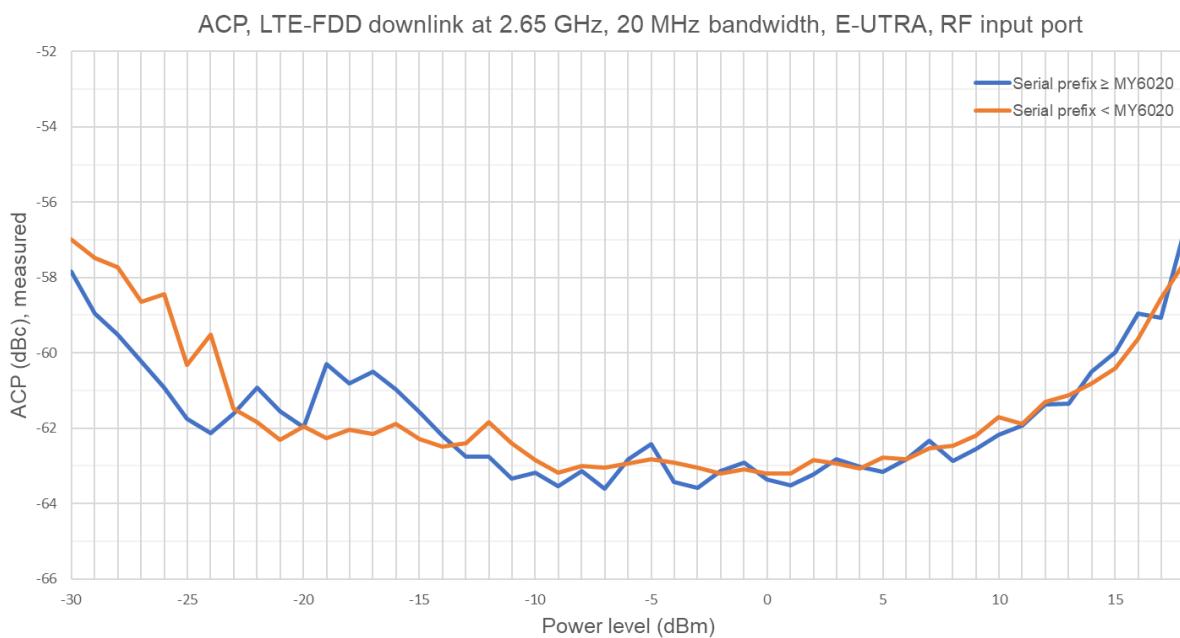


Figure 6. LTE-FDD downlink ACP vs. input power level at 2.65 GHz with 20 MHz bandwidth

LTE Source Key Specifications

Modulated signal level accuracy						
RF output port, half duplex port, FDD, relative to CW, at –10 to +5 dBm output power						
600 to 3800 MHz	± 0.4 dB, ± 0.26 dB typical					
Error vector magnitude (EVM)						
Composite EVM, RF output port, half duplex port, at 0 dBm output power						
RMS ¹ , 20 MHz bandwidth	< 0.3% nominal					
Serial prefix ≥ MY6020, with Opt. EP6, at –10 dBm or 0 dBm input power						
FDD	900 MHz	5 MHz bandwidth	< 0.3%, < 0.2% typical			
		20 MHz bandwidth	< 0.3%, < 0.2% typical			
	2000 MHz	5 MHz bandwidth	< 0.3%, < 0.2% typical			
		20 MHz bandwidth	< 0.35%, < 0.25% typical			
TDD	900 MHz	5 MHz bandwidth	< 0.4%, < 0.25% typical			
		20 MHz bandwidth	< 0.4%, < 0.25% typical			
	2000 MHz	5 MHz bandwidth	< 0.4%, < 0.25% typical			
		20 MHz bandwidth	< 0.4%, < 0.25% typical			
Adjacent channel power (RF Output Port, Half Duplex Port)						
Serial prefix < MY6020, at 0 dBm output power		Adjacent, nominal	Alternate, nominal			
900 MHz		–64 dBc	–64 dBc			
2000 MHz		–65 dBc	–65 dBc			
Serial prefix ≥ MY6020, with Opt. EP6, at –10 dBm input power		Adjacent	Alternate			
FDD	900 MHz	5 MHz bandwidth	–67 dBc, –70 dBc typical			
		20 MHz bandwidth	–63 dBc, –66 dBc typical			
	2000 MHz	5 MHz bandwidth	–66 dBc, –69 dBc typical			
		20 MHz bandwidth	–64 dBc, –67 dBc typical			
TDD	900 MHz	5 MHz bandwidth	–66 dBc, –69 dBc typical			
		20 MHz bandwidth	–62 dBc, –65 dBc typical			
	2000 MHz	5 MHz bandwidth	–65 dBc, –68 dBc typical			
		20 MHz bandwidth	–63 dBc, –67 dBc typical			
Serial prefix ≥ MY6020, with Opt. EP6, at 0 dBm input power		Adjacent	Alternate			
FDD	900 MHz	5 MHz bandwidth	–66 dBc, –69 dBc typical			
		20 MHz bandwidth	–62 dBc, –64 dBc typical			
	2000 MHz	5 MHz bandwidth	–64 dBc, –67 dBc typical			
		20 MHz bandwidth	–63 dBc, –66 dBc typical			
TDD	900 MHz	5 MHz bandwidth	–65 dBc, –68 dBc typical			
		20 MHz bandwidth	–62 dBc, –64 dBc typical			
	2000 MHz	5 MHz bandwidth	–64 dBc, –67 dBc typical			
		20 MHz bandwidth	–63 dBc, –66 dBc typical			

1. For specified frequency ranges between 695 and 3800 MHz.

EVM, LTE-FDD downlink at 2.65 GHz, 20 MHz bandwidth, RF output port

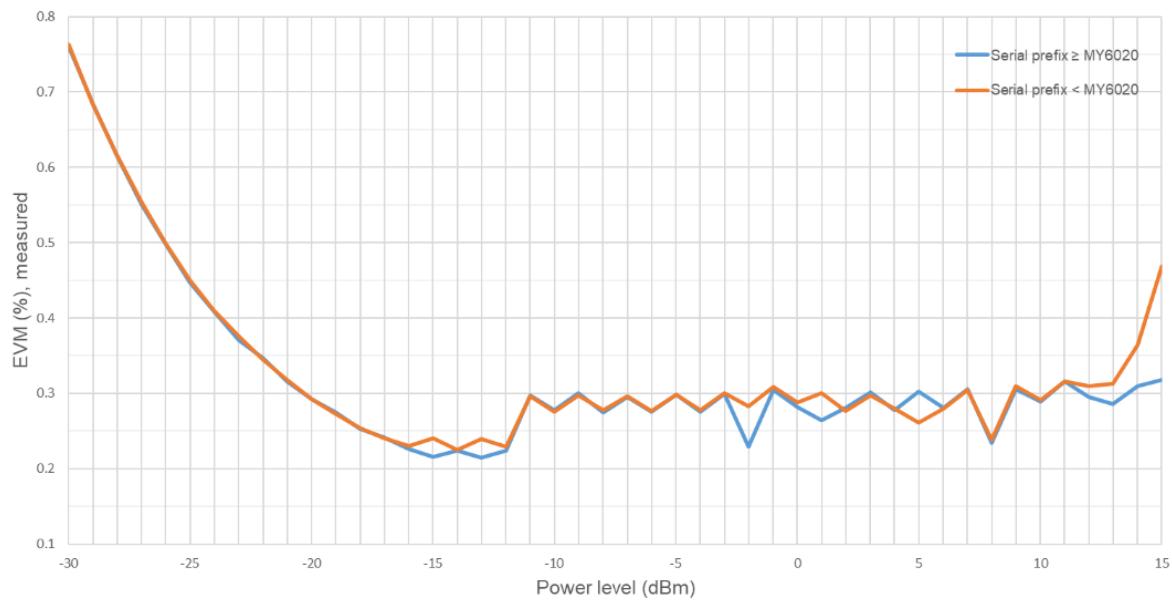


Figure 7. LTE-FDD downlink EVM vs. output power level at 2.65 GHz with 20 MHz bandwidth

ACP, LTE-FDD downlink at 2.65 GHz with 20 MHz bandwidth, RF output port

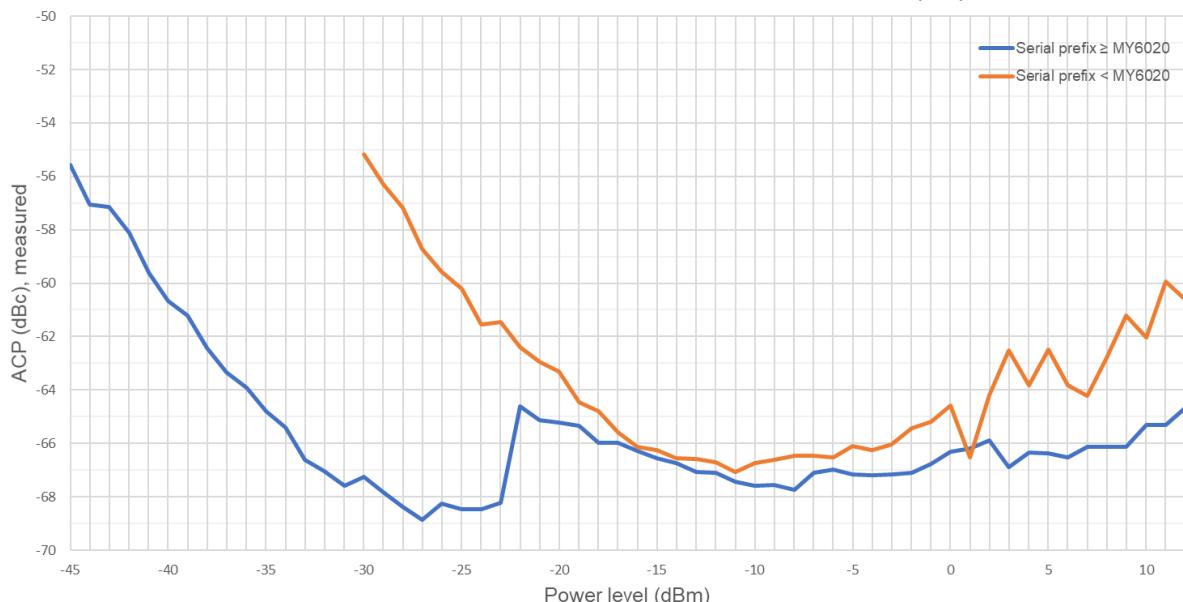


Figure 8. LTE-FDD downlink ACP vs. output power level at 2.65 GHz with 20 MHz bandwidth

WLAN Measurement Application Key Specifications

Modulated power		
Absolute power accuracy		
	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
2400 MHz to 2483.5 MHz	±0.29 dB nominal at 0 dBm input power	±0.33 dB nominal at 0 dBm input power
5150 MHz to 5185 MHz	±0.61 dB nominal at 0 dBm input power	±0.50 dB nominal at 0 dBm input power
Error vector magnitude (EVM)		
EVM floor conditions Phase Tracking on, Eq Smoothing on, Eq Training Seq only, RF input port, half duplex port, at -20 dBm input power, optimized range, nominal		
	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
802.11a 5.8 GHz	< -48 dB	< -51 dB
802.11b 2.4 GHz	< -50 dB	< -53 dB
802.11g 2.4 GHz	< -50 dB	< -53 dB
802.11n 5.8 GHz 20 MHz	< -48 dB	< -52 dB
802.11n 5.8 GHz 40 MHz	< -46 dB	< -51 dB
802.11ac 5.8 GHz 80 MHz	< -46 dB	< -48 dB
802.11ac 5.8 GHz 160 MHz	< -44 dB	< -46 dB
802.11ax 5.8 GHz 80 MHz	< -46 dB	< -48 dB
802.11ax 5.8 GHz 160 MHz	< -44 dB	< -46 dB



Figure 9. WLAN 802.11ax EVM vs. input power level at 5.8 GHz

WLAN Source Key Specifications

Error vector magnitude (EVM)	
RF output port, half duplex port, at -5 dBm to -15 dBm output power, nominal	
802.11a 5.8 GHz	< -46 dB
802.11b 2.4 GHz	< -50 dB
802.11g 2.4 GHz	< -50 dB
802.11n 5.8 GHz 20 MHz	< -46 dB
802.11n 5.8 GHz 40 MHz	< -46 dB
802.11ac 5.8 GHz 80 MHz	< -47 dB
802.11ac 5.8 GHz 160 MHz	< -45 dB
802.11ax 5.8 GHz 80 MHz	< -47 dB
802.11ax 5.8 GHz 160 MHz	< -45 dB

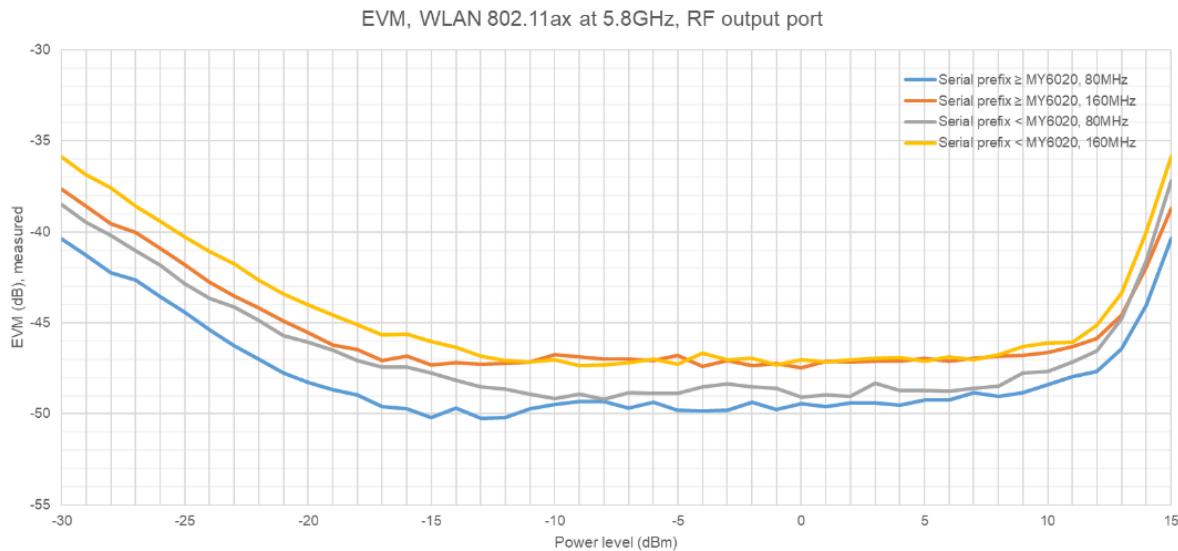


Figure 10. WLAN 802.11ax EVM vs. output power level at 5.8 GHz

5G NR Measurement Application Specifications

Transmit power		
	Serial prefix < MY6020	Serial prefix ≥ MY6020, with Opt. EP6
Absolute power accuracy	±0.48 dB nominal at 0 dBm input power	±0.43 dB nominal at 0 dBm input power
Error vector magnitude (EVM)		
Residual EVM, RF input port, half duplex port		
Serial prefix < MY6020, at -10 dBm input power		
30 kHz SCS, 5 GHz, 100 MHz (64 QAM, 256 QAM)	0.3% nominal	
Serial prefix ≥ MY6020, with Opt. EP6, at -10 dBm or 0 dBm input power		
30 kHz SCS, 4 GHz, 100 MHz (64 QAM, 256 QAM)	0.49% downlink, 0.44% uplink	
30 kHz SCS, 5 GHz, 100 MHz (64 QAM, 256 QAM)	0.50% downlink, 0.44% uplink	
Adjacent channel power		
RF input port, half duplex port		
Serial prefix < MY6020, at 0 dBm input power		
30 kHz SCS, 5 GHz, 100 MHz (64 QAM, 256 QAM)	-56 dBc nominal, noise correction off -63 dBc nominal, noise correction on	
Serial prefix ≥ MY6020, with Opt. EP6, at -10 dBm or 0 dBm input power		
30 kHz SCS, 4 GHz, 100 MHz (64 QAM, 256 QAM), 30 kHz SCS, 5 GHz, 100 MHz (64 QAM, 256 QAM)	-54 dBc typical, -55 dBc nominal, noise correction off -64 dBc typical, -65 dBc nominal, noise correction on	

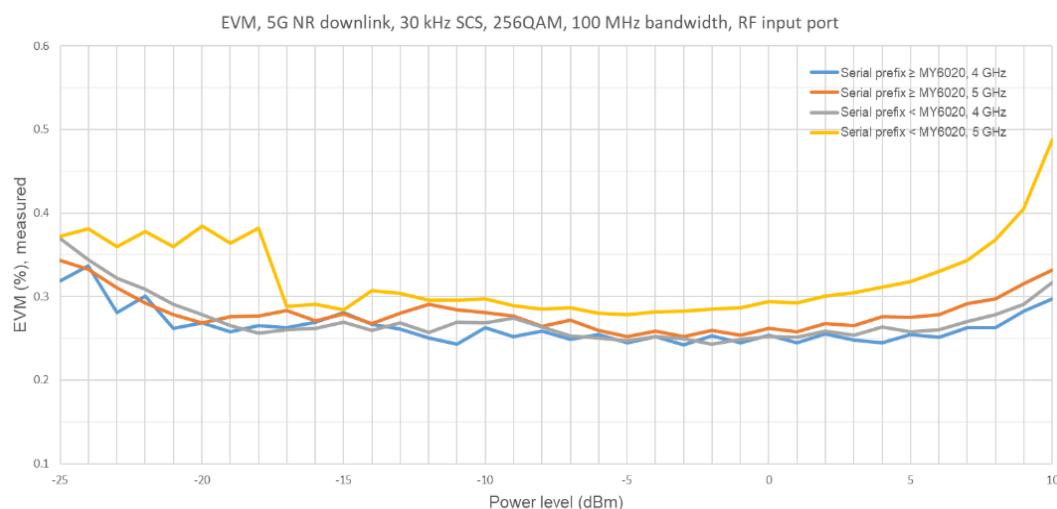


Figure 11. 5G NR downlink EVM vs. input power level at 4 GHz and 5 GHz with 100 MHz bandwidth, 30 kHz SCS, 256 QAM



Figure 12. 5G NR downlink ACP vs. input power level at 5 GHz with 100 MHz bandwidth, 30 kHz SCS, 256 QAM

5G NR Source Key Specifications

Modulated signal level accuracy		
RF output port, half duplex port, relative to CW, at -10 to $+5$ dBm output power		
600 to 5000 MHz	± 0.35 dB, ± 0.17 dB typical	
Error vector magnitude (EVM)		
Composite EVM, RF output port, half duplex port		
Serial prefix < MY6020	at -10 dBm output power	
30 kHz SCS, 4 GHz, 100 MHz (64 QAM, 256 QAM)	0.4% nominal	
30 kHz SCS, 5 GHz, 100 MHz (64 QAM, 256 QAM)	0.6% nominal	
Serial prefix \geq MY6020, with Opt. EP6	at -10 dBm output power	at 0 dBm output power
30 kHz SCS, 4 GHz, 100 MHz (64 QAM, 256 QAM)	0.5%, 0.35% typical	0.55%, 0.40% typical
30 kHz SCS, 5 GHz, 100 MHz (64 QAM, 256 QAM)	0.5%, 0.35% typical	0.55%, 0.40% typical
Adjacent channel power		
RF output port, half duplex port		
Serial prefix < MY6020	at 0 dBm output power	
30 kHz SCS, 4 GHz, 100 MHz (64 QAM, 256 QAM)	-57 dBc nominal	
30 kHz SCS, 5 GHz, 100 MHz (64 QAM, 256 QAM)	-55 dBc nominal	
Serial prefix \geq MY6020, with Opt. EP6	at -10 dBm output power	at 0 dBm output power
30 kHz SCS, 4 GHz, 100 MHz (64 QAM, 256 QAM)	-56 dBc, -58 dBc typical	-54 dBc, -57 dBc typical
30 kHz SCS, 5 GHz, 100 MHz (64 QAM, 256 QAM)	-50 dBc, -53 dBc typical	-50 dBc, -53 dBc typical

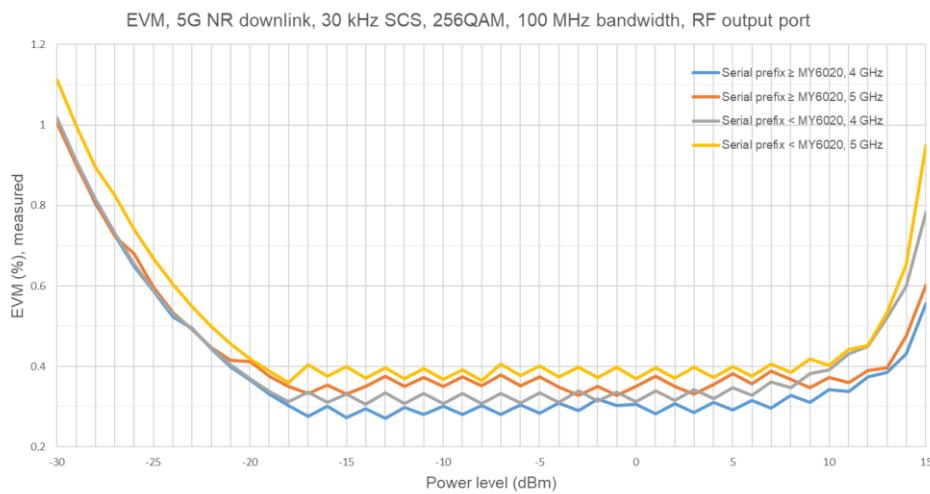


Figure 13. 5G NR downlink EVM vs. output power level at 4 GHz and 5 GHz with 100 MHz bandwidth, 30 kHz SCS, 256QAM

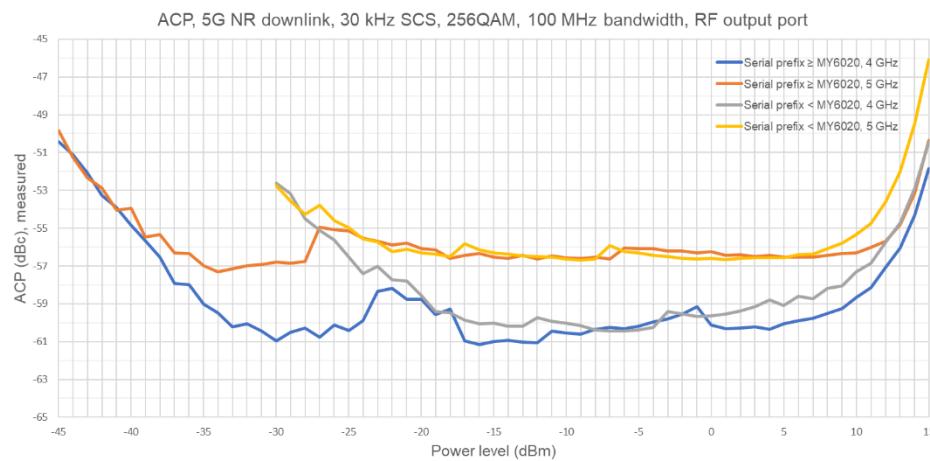


Figure 14. 5G NR downlink ACP vs. output power level at 4 GHz and 5 GHz with 100 MHz bandwidth, 30 kHz SCS, 256 QAM

Related Literature

For more detailed product and specification information refer to the following literature and web pages:

- M9410A and M9411A VXT PXIe Vector Transceivers Configuration Guide (literature no. 5992-3303EN)
- M9018B PXIe 18 slot Chassis Data Sheet (literature no. 5992-1481EN)
- M9037A PXIe High Performance Embedded Controller Data Sheet (literature no. 5991-3661EN)
- X-Series Measurement Applications Brochure (literature no. 5989-8019EN)
- Signal Studio Software Brochure (literature no. 5989-6448EN)



ООО «4TECT»

Телефон: +7 (499) 685-4444

info@4test.ru

www.4test.ru

