



PRODUCT DATA SHEET

C3908

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Electrical Specifications:

Frequency: 80 - 1000 MHz
 Power: 1500 W CW
 Coupling: 50 ± 1.0 dB Max.
 Insertion Loss: 0.1 dB Max.
 Flatness: ± 0.3 dB Max.
 VSWR (ML): 1.20:1 Max.
 Directivity: 20 dB Min.

Mechanical Specifications:


Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F
 Type I Class 3 (Yellow Iridite)
 RoHS Compliant Available

Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 95% Non-Condensing
 Size: 3.0 x 3.0 x 1.09"

Connector Configurations:


Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C3908-10	N Female	N Female	N Female	N Female
C3908-12	N Female	N Female	SMA	SMA
C3908-13	N Female	N Female	BNC	BNC
C3908-20	7/16 Female	7/16 Female	N Female	N Female
C3908-22	7/16 Female	7/16 Female	SMA	SMA
C3908-23	7/16 Female	7/16 Female	BNC	BNC
C3908-610	N Female	N Male	N Female	N Female
C3908-627	7/16 Female	7/16 Male	N Female	N Female
C3908-712	N Male	N Female	SMA	SMA
C3908-714	N Male	N Female	N Female	N Female
C3908-727	7/16 Male	7/16 Female	N Female	N Female
C3908-728	7/16 Male	7/16 Female	SMA	SMA

(7/16-F Main Line connector option increases size to 3.0 x 3.0 x 1.59")

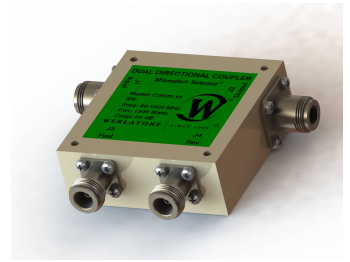


Performance Data (Specifications subject to change without notice):


Coupling:

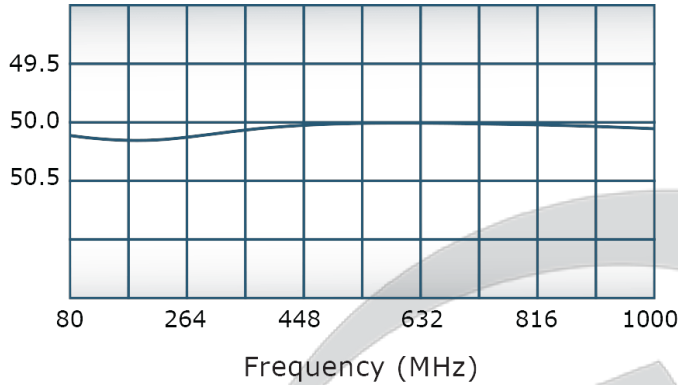


VSWR:

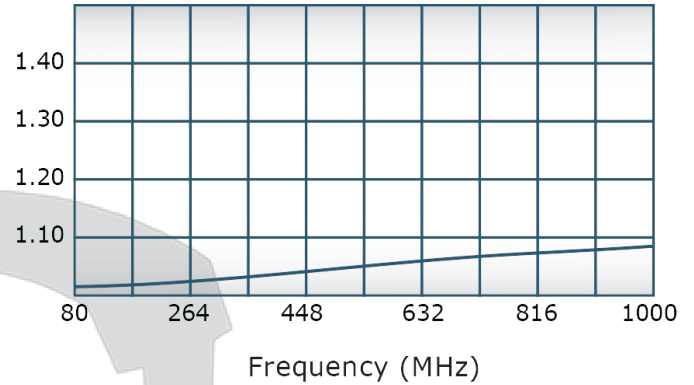


Insertion Loss:

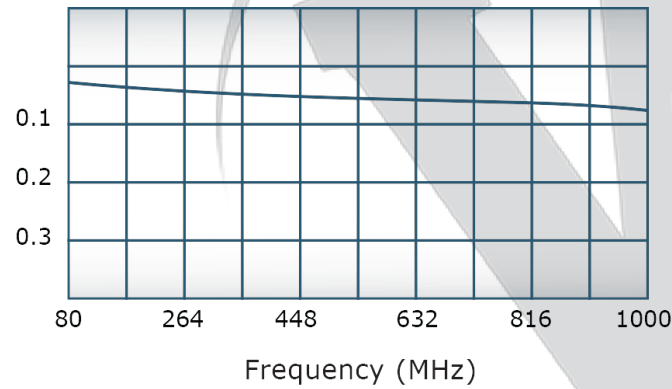

Directivity:

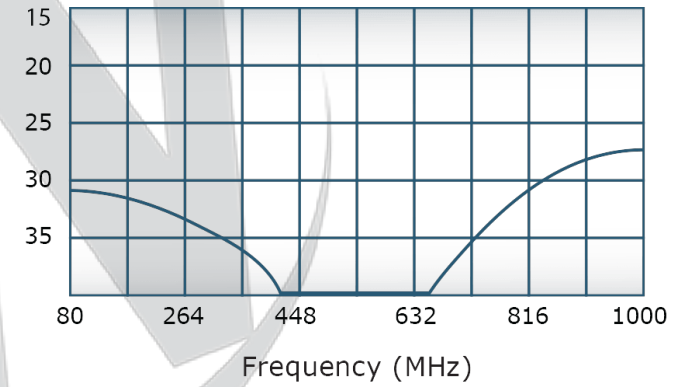

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

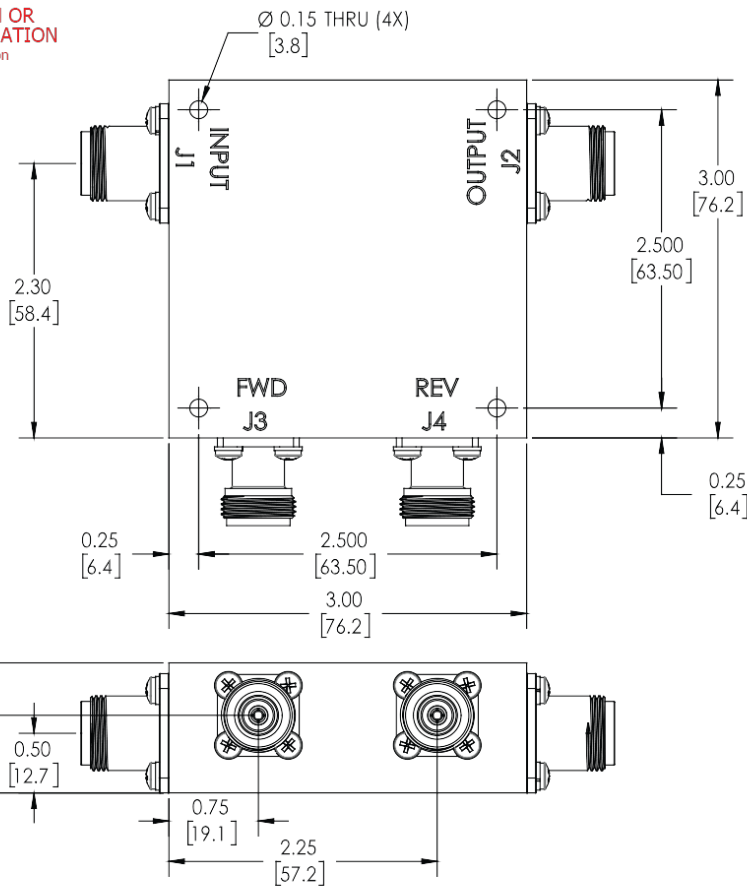

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/27/18	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL_5541F TYPE I CLASS 3 (YELLOW IRIDITE)**

UNLESS OTHERWISE SPECIFIED		OWN	DATE	WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563
• INTERPRET DRAWING JAW MIL-STD-130 • DIMENSIONING PER ASME Y14.5M-2009 • PARENTHESES FOR REF ONLY • DIMENSIONS ARE IN INCHES • DIMENSIONAL LIMITS APPLY BEFORE PROCESSES • TOLERANCES: ANGLES: ± 2° 3 PL. ± .005 (1.3) 2 PL. ± .015 (1.3) • REMOVE ALL BURRS AND SHARP EDGES R.01 MAX • CONCENTRICITY MACHINED DIA: .002 FIM • MACHINE TOOL IMPACT: .003 MAX		CHK	DATE		
NEXT ASSY		ENGR	DATE	TITLE	
USED ON		MJ	7/5/2001	OUTLINE	
APPLICATION		MFR	DATE	SIZE	CAGE CODE
THIRD ANGLE PROJECTION		QA	DATE	B	10379-505
		RELSE	DATE	DAWG NO	REV
				SCALE	A
				1:1	SHEET 1 OF 1



OOO «4TECT»
 Телефон: +7 (499) 685-4444
 info@4test.ru
 www.4test.ru