

## 3109 BICONICAL ANTENNA

ETS-Lindgren's Model 3109 Biconical Antenna uses a modified Guanella balun for impedance transformation and matching.



ETS-Lindgren's Model 3109 Biconical Antenna uses a modified Guanella balun for impedance transformation and matching. The Model 3109 provides a broad frequency range and because it is constructed of much heavier materials, it has a maximum continuous input power up to 1 kW, with a peak power handling capability up to 2 kW. While this antenna

typically has a high VSWR at frequencies below 70 MHz, it is still capable of generating a high field strength with acceptable input power in this region of the band. The optional extended elements markedly improve its performance in this region. This antenna is ideal for IEC 1000-4-3 testing.

ETS-Lindgren is the only manufacturer to offer optional extended elements. These elements are twice as long as standard elements and enable users to generate high fields at low frequencies with less than 25% of the power usually required.

### Key Features

- Frequency Range 20 MHz to 300 MHz
- Peak Power Handling Capability Up to 2 kW
- Unique Element Design Improves Performance
- Compact Size for Use in Limited Space
- Improved Balun Design for Increased Efficiency
- Quality Construction for Trouble-Free Service

### Specifications

#### Electrical Specifications

**Frequency Minimum:** 20 MHz  
**Frequency Maximum:** 300 MHz  
**Connectors:** Type N (f)  
**Impedance (Nominal):** 50  $\Omega$   
**Maximum Continuous Power:** 1 kW (N); 1,5kW (7/16 DIN)  
**Pattern Type:** Omnidirectional  
**Peak Power:** 2 kW  
**Polarization:** Linear  
**VSWR (Average):** 1.9:1

#### Physical Specifications

**Width:** 133 cm (52.36 in)  
**Weight:** 3.2 kg (7.05 lb)

**4TECT**  
OOO "4TECT"  
+7(499)685-44-44  
info@4test.ru  
www.4test.ru

**ETS-LINDGREN**  
An ESCO Technologies Company

## Additional Specifications

---

- Antenna (Balun and Elements)
- Balun acts as Base Accepts an ETS-Lindgren Tripod or Most Other Manufacturers Tripods
- VSWR data provided


## Product Options

---


- Custom Case
- ETS-Lindgren Manufacturers Several Non-metallic, Non-reflective Tripods
- Antenna Factor and Gain Data provided at additional cost
- Optional 7/16 DIN connector for higher input power applications

Product Charts


3109 Biconical Antenna Factor

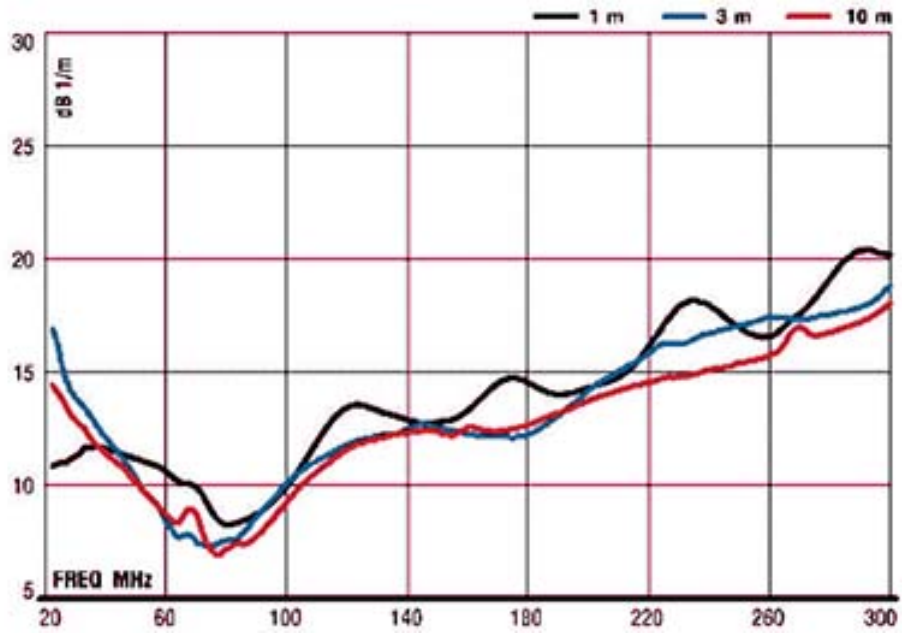


3109 Forward Power at 1 m

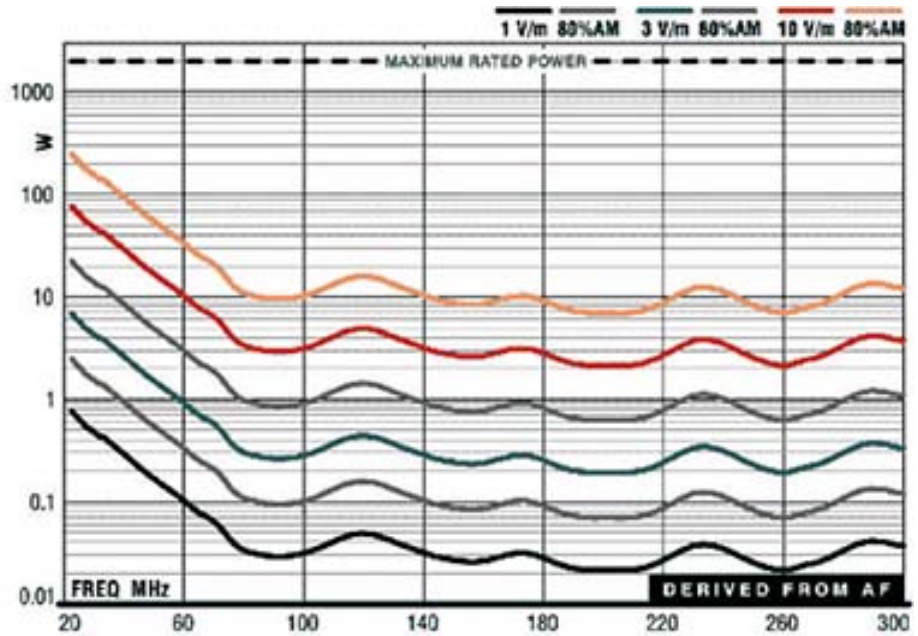


3109 Forward Power at 3 m

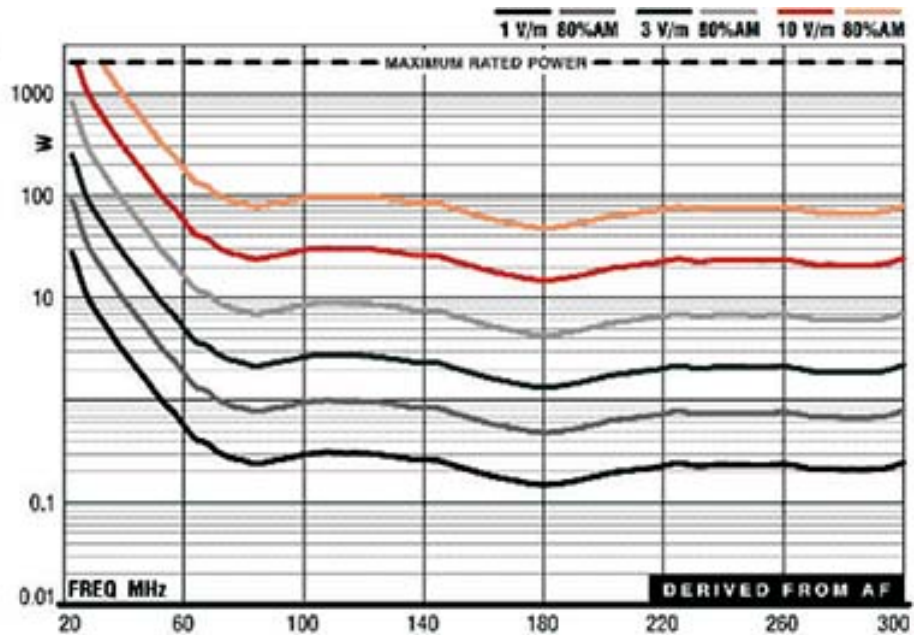


3109 Forward Power at 3 m

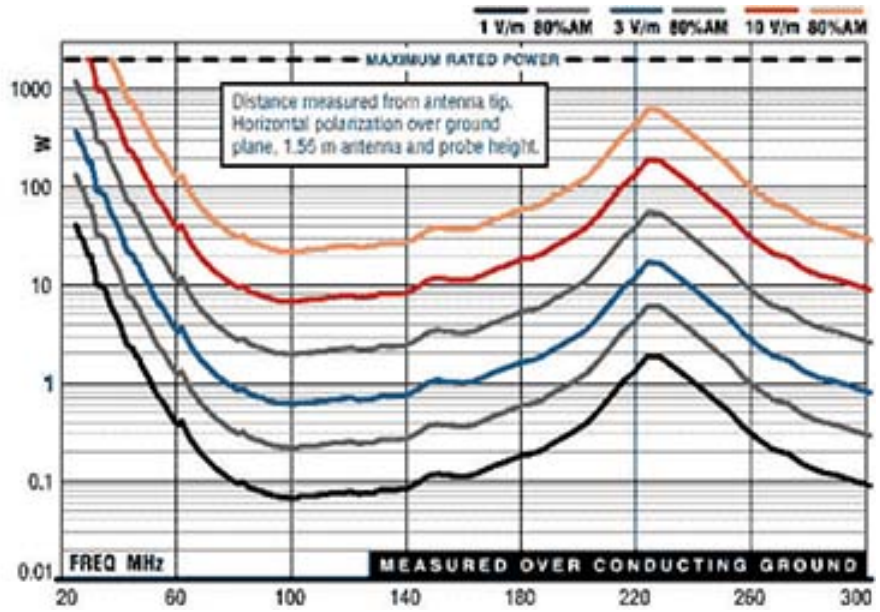

3109 Biconical Antenna Gain

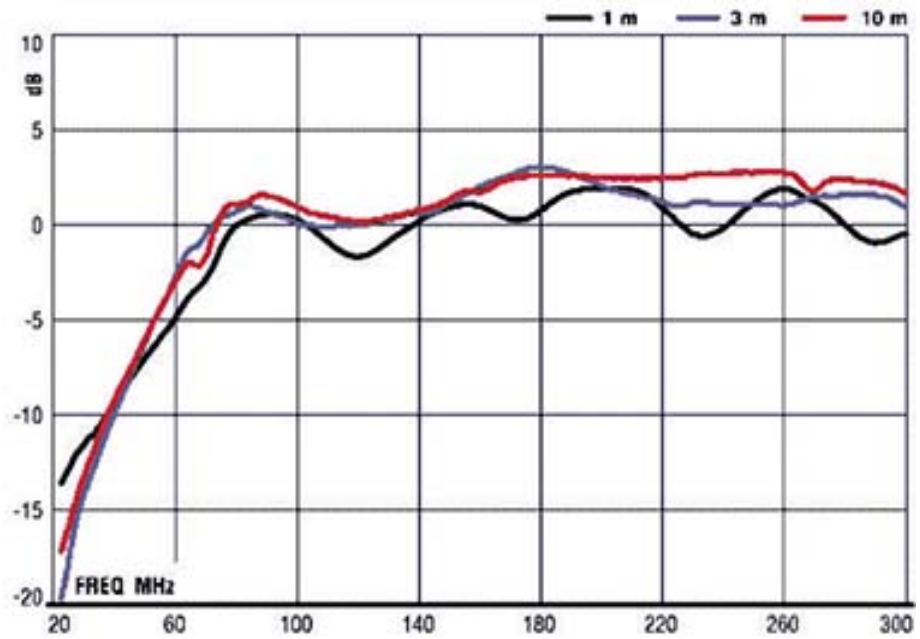

3109 Biconical Antenna Half Power Beamwidth

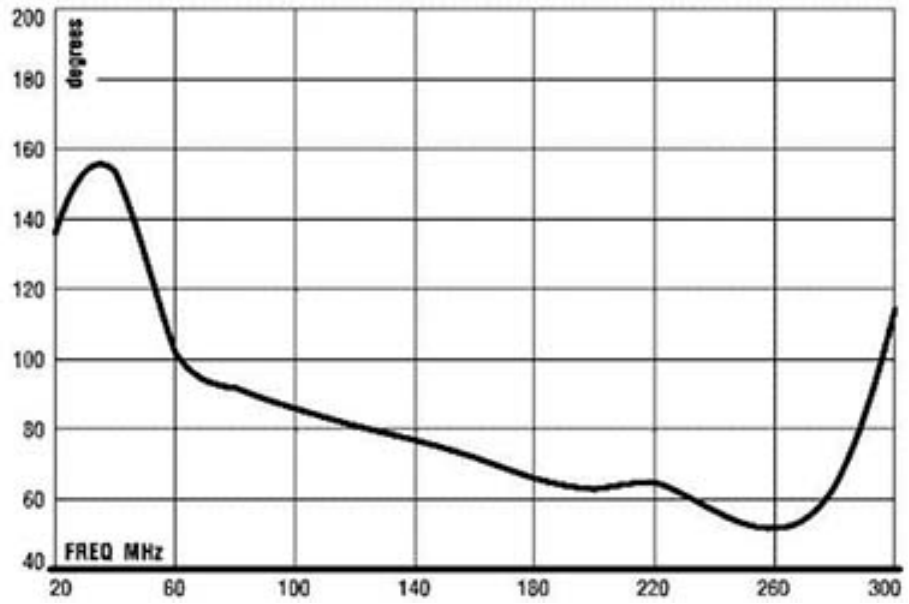

3109 Biconical Antenna VSWR

