

DSH-1250H DURASORB™ POLYSTYRENE HYBRID ABSORBER

ETS-Lindgren's DuraSorb™ DSH-1250H Absorber is the latest evolution of ETS-Lindgren's low profile, hybrid anechoic absorber technology.



ETS-Lindgren's DuraSorb DSH-1250H Absorber is the latest evolution of ETS-Lindgren's low profile, hybrid anechoic absorber technology. It combines the advantages of the proven FerroSorb performance with the physical properties of the PS Series absorbers.

DuraSorb is constructed using substrates with rigid, closed cell foams, which are loaded volumetrically and uniformly throughout the absorbers. DSH-1250H is ideal for 5m range and 10m range chambers. Due to the close cell nature of the material, ETS-Lindgren's Durasorb absorber has the capability to achieve a cleanroom level requirement (ISO8).

Key Features

- 30 MHz to 40 GHz Frequency Range
- For ANSI C63.4 and CISPR
- Durable Construction, Precision Installation Design
- **Suited for Cleanroom Environments (ISO8)**
- Non-hygroscopic Substrate

Features

Frequency Range

The DSH-1250H provides a smooth transition from free space impedance to the lossy ferrite tile base. As a result of its optimized design, high performance is guaranteed not only at the lower frequency band, but also at above 1 GHz.

Meets Multiple Standards

The absorption levels make DuraSorb ideal for treating semi-anechoic chambers for 5m and 10m range measurements per the CISPR 16 and ANSI C63.4 standards.

Durable Construction, Designed for Precision Installation

DuraSorb is manufactured by injecting uniformly loaded lossy materials in predetermined geometric shapes to produce the desired performance. After the lightweight substrates have been molded, they are shipped disassembled to job-sites for reduced shipping volume. Easily assembled at the site, finished absorbers are pressed and glued into a lightweight polystyrene universal mounting base on the walls and ceiling of the chamber. This method assures absorber rows are aligned with geometric precision. DSH-1250H measures 125 cm (49.2 in) height, and each 60 cm x 60 cm (23.6 in x 23.6 in) standard piece consists of two wedge shaped pyramids.

Non-hygroscopic & Fire Resistant

DuraSorb is intrinsically non-hygroscopic due to its closed cell design. Furthermore, DuraSorb is engineered to have outstanding fire resistance. The material is treated additionally with environmentally friendly fire retardants beyond what is normally required for construction grade foams. DuraSorb material has been tested to meet the requirements of UL94 HBF and DIN 4102 B2.

4TECT

ООО «4ТЕСТ»

Телефон: +7 (499) 685-4444

info@4test.ru

www.4test.ru

Specifications

Physical Specifications

Height (With Ferrite Tile Base): 125.0 cm (49.21 in)

Width: 60.0 cm (23.62 in)

Depth: 60.0 cm (23.62 in)

Weight: 15 lbs


Additional Specifications

- DuraSorb Polystyrene Absorber
- PS-1001 Polystyrene Universal Mounting Base
- Ferrite Substrate
- Polystyrene White Caps

Product Options

Product Charts

DSH-1250H DuraSorb™
Polystyrene Hybrid
Absorber Typical
Reflectivity

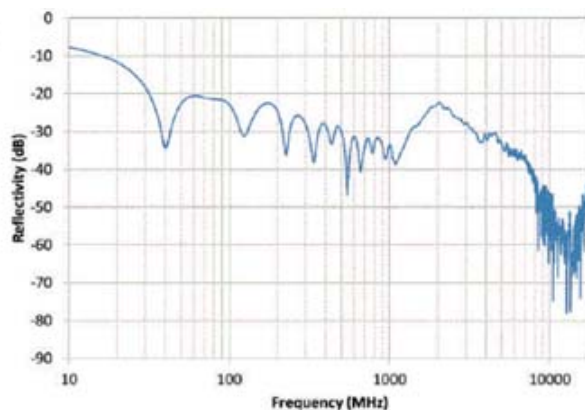

4TECT

ООО «4TECT»

Телефон: +7 (499) 685-4444

info@4test.ru

www.4test.ru

 **ETS-LINDGREN**
An ESCO Technologies Company