

VIAVI


SmartClass OCC-56C

Optical DWDM Channel Checker

The VIAVI SmartClass™ optical handhelds go beyond the basics. The SmartClass OCC-56C is a handheld, battery-operated dense wavelength division multiplexing (DWDM) channel checker that is ideal for field service groups tasked with the installation, maintenance, and upgrades of DWDM systems.

The SmartClass OCC-56C scans the DWDM system and automatically records all channels with the wavelength/frequency and the related power level. Information can be displayed in a graphical spectrum format or in a table of results so that users can easily check the performance of each and every channel.

The SmartClass OCC-56C DWDM channel checker covers all ITU-T frequencies from 191.600 to 196.100 THz based on a 100 GHz grid.

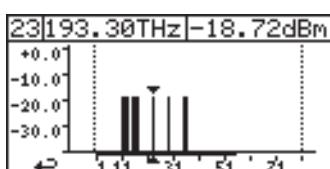

Graphical display

Cursor position indicates channel shown in the upper section of the display.

CH	f/THz	Lev/dBm
11	192.20	-75.46
12	192.25	-75.61
13	192.30	-75.36
14	192.35	-13.56

Tabular display

Channel number and frequency (wavelength) with the relevant power level is listed in a compact format.

EDIT PARAMETER GR:1	
Start	1559.79nm
Spacing	100GHz
Number	38
Stop	1530.33nm
Select Channel	

Define customized wavelength grids to optimize measurements. Save up to 10 sets of parameters on the SmartClass OCC-56C.


Key Benefits

- Industry's smallest and lightest DWDM channel checker
- Supports C-band applications
- Outstanding battery life ensures highest flexibility
- Graphical/tabular display mode
- Supports 100 or 200 GHz channel spacing (according to ITU-T)
- Save results via internal memory or external USB memory stick
- Report generation software OFS-355






OCK-10 Optical Connector Cleaning Kit
(accessory)

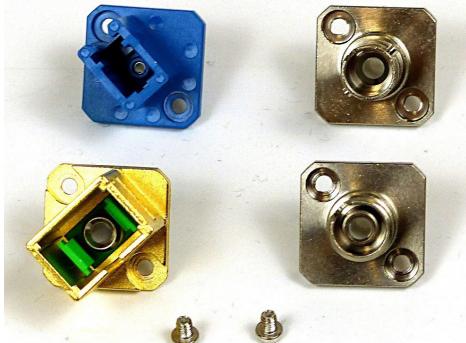

Optical adapters (BN 2155) for signal input



Worldwide compatible AC adapter/charger
(SNT-121A)

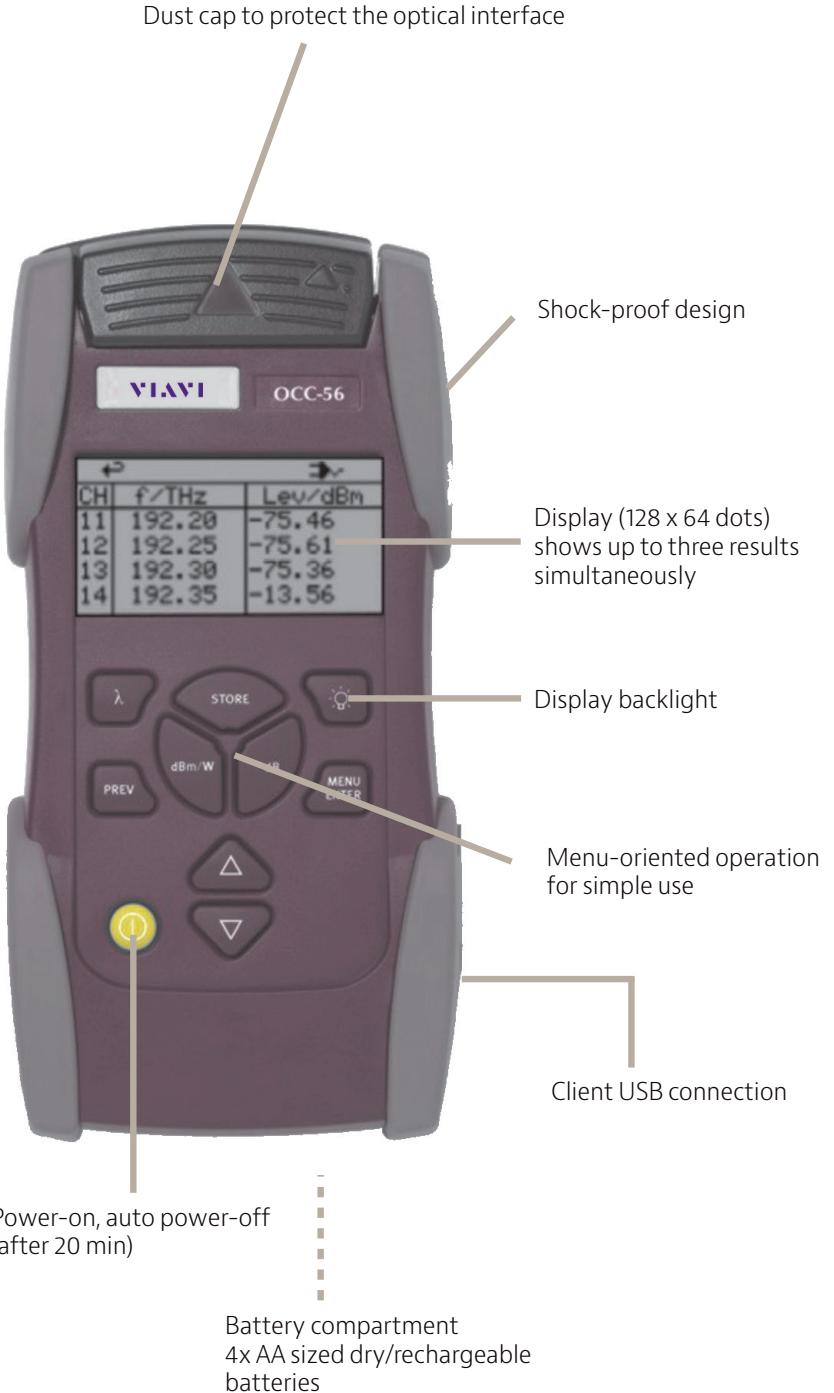

Specifications

General		Dimensions and Weight	
Wavelength range	1528.77 to 1564.68 nm; 196.10 to 191.60 THz	W × H × D approximately	95 × 60 × 195 mm (3.74 × 2.36 × 7.68 in)
Wavelength accuracy	typ. ± 50 pm	Weight approximately	500 g (1.1 lb)
Channel spacing	100/200 GHz		
Channel power range	<-70 to +10 dBm		
Absolute accuracy ^{1,2}	<±1 dB		
Readout resolution	±0.01dB		
Filter bandwidth @3 dB	min. 0.34 nm		
Measurement time	~ 10 s (full span, 46 ch) typ.		
Optical interface	Interchangeable APC		
Max. composite power	+22 dBm all channels; +10 dBm one channel		
Return loss	>35 dB		
Graphical display trace	Bar graph, 50 GHz/pixel		
Table	ch-no, wavelength, power		
Functions	Zoom, marker		
Sweep mode	Single, continuous		
Remote control	via USB interface		
Display		Base Unit	
Graphical display, resolution of 128 × 64 dots, displays up to four laser status screens		OCC-56 C (C-band)	BN 2277/44
Backlight function switchable via a separate key		SmartClass OCC-56 Includes	
Optical Adapters		4 NiMH rechargeable cells (AA)	BN 2237/90.02
Interchangeable optical adapters. SC, FC, ST, LC- type available.		SNT-121A Worldwide compatible AC adapter	BN 2277/90.01
Power Supply		Operating manual BN 2277/98.22	BN 2277/98.22
Four dry batteries Mignon/AA, 1.5 V or NiMH rechargeable cells Mignon/AA, 1.2 V		MT-1S belt bag for one instrument	BN 2277/90.02
Operating time from dry batteries	typ. 7 h ³	Interchangeable adapter	SC-type (2155/06) mounted; FC-type (2155/05) included
Power Saving		Accessories	
The instrument switches off automatically after ~20 min (function can be disabled)		Optical adapter ST type	BN 2155/00.32
AC line operation via separate AC adapter		Optical adapter SC type	BN 2155/06
Integrated fast battery charging function (2 hours)		Optical adapter FC type	BN 2155/05
Electromagnetic Compatibility		Optical adapter LC type	BN 2155/07
Corresponds to IEC 61326 (CE conformance)		OCK-10 Optical Connector Cleaning Kit	BN 2229/90.21
Calibration		NiMH cells, Mignon/AA, 1.2 V (4 required per instrument)	BN 2237/90.02
Suggested calibration interval	3 years	SNT-121A Worldwide compatible AC adapter	BN 2277/90.01
Temperature		MT-1S belt bag for one instrument	BN 2277/90.02
Operation	-5 to +55°C		
Storage	-40 to +70°C		