


## DataSheet

# SDS1000CFL Series Digital Oscilloscope

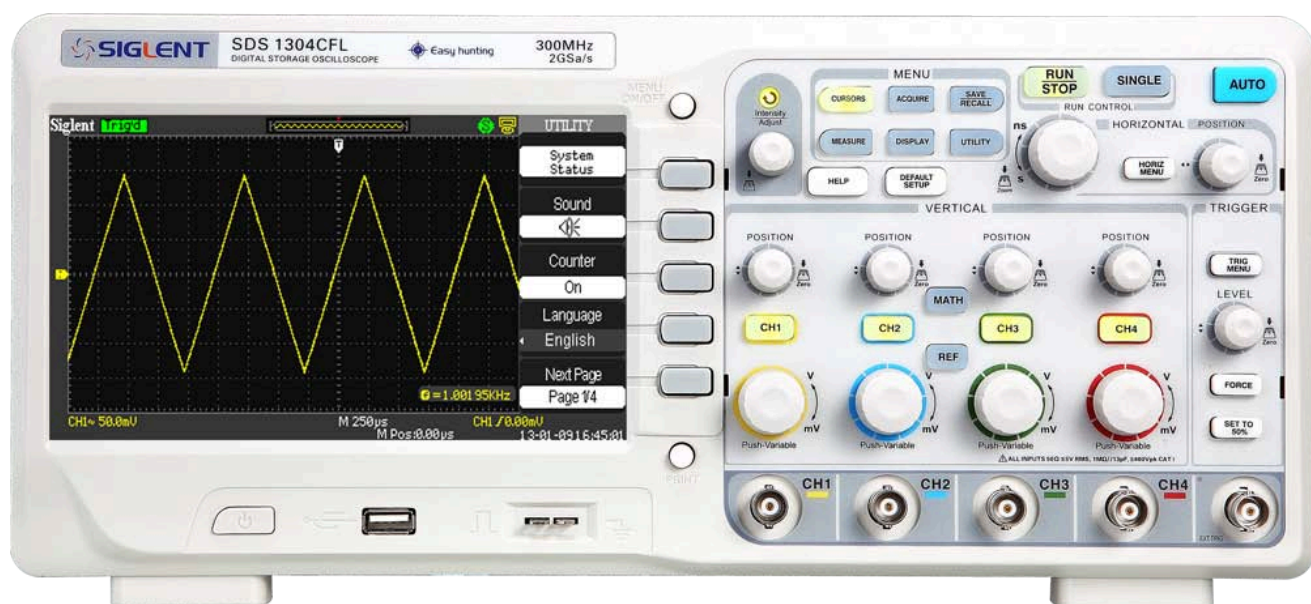

**4TECT**

ООО «4TECT»

Телефон: +7 (499) 685-4444

info@4test.ru

www.4test.ru

## CHARACTERISTIC:

- The volume of the oscilloscope is cabinet and it is portable
- 7" Color TFT LCD display
- 2/4 channels, Bandwidth: 70MHz-300 MHz
- Single real-time sampling rate is:2GSa/s, Equivalent sampling rate is 50GSa/s.
- Memory depth is 24Kpts.
- Trigger types: Edge, Pulse, Video, Slope and Alternative
- Unique Digital Filter function and Waveform recorder function
- Auto measure thirty two parameters and support all measurement function.
- Two/Four groups' reference waveforms and twenty groups' capture waveforms and twenty groups' setups internal save/recall function and USB flash drive save/recall function.
- Cursor types: Manual mode, Track mode and Auto mode.
- Channel waveform and its FFT waveform display on split screen.
- Waveform Intensity and Grid Brightness can be adjusted.
- Menu display in the form of pop-up that in order to convenience users to use it.
- Rich Screen display styles: Classical, Modern, Tradition, Succinct.
- Multiple Language User Interface.
- Support Multilingual online help system
- Standard interface: Double USB Host; USB Device; LAN Port; Pass/Fail Out

## Specifications

All specification applies to 10X probe and All the SDS1000CFL Series Digital Storage Oscilloscopes.

To verify that the oscilloscope meets specifications, the oscilloscope must first meet the following conditions:

- The oscilloscope must have been operating continuously for thirty minutes within the specified operating temperature.
- You must perform the Do Self Cal operation, accessible through the Utility menu, if the operating temperature changes by more than 5° C.
- The oscilloscope must be within the factory calibration interval

All specifications are guaranteed unless noted “typical.”

|   |  |
|---|--|
| Inputs  |  |
| Input Coupling  | AC, DC, GND  |
| Input Impedance   | 1MΩ±2%    18Pf±3Pf,<br>50Ω+/-2%(SDS1304CFL/SDS1302CFL,<br>SDS1204CFL/SDS1202CFL contain this function)   |
| Maximum input voltage                                       | 400V (DC+AC PK-PK, 1MΩ input impedance, X10) , CAT I   |
| Ch to Ch Isolation<br>(Both channels in same V/div setting) | >100:1 at 150MHz (SDS1304CFL,SDS1302CFL)<br>>100:1 at 100MHz (SDS1204CFL,SDS1202CFL)<br>>100:1 at 50MHz (SDS1104CFL,SDS1102CFL)<br>>100:1 at 35MHz (SDS1074CFL,SDS1072CFL) |
| Probe attenuator  | 1X,10X   |
| Probe attenuator Factors Set                                | 1X,5X,10X,50X,100X ,500X,1000X   |
| Vertical System   |  |
| Vertical Sensitivity  | 2mV/div -5V/div(1-2-5 order)   |
| Channel voltage offset range                                | 2mV-100mV: ±800mV<br>102mV-5V: ±40V  |

|  |   |
|--|---|
| Vertical Resolution                                    | 8 bit   |
| Channels   | 2/4   |
| Analog Bandwidth                                       | 300MHz(SDS1304CFL, SDS1302CFL)<br>200MHz(SDS1204CFL, SDS1202CFL)<br>100MHz(SDS1104CFL, SDS1102CFL)<br>70MHz(SDS1074CFL, SDS1072CFL)                                 |
| Single-shot Bandwidth                                  | 300MHz(SDS1304CFL, SDS1302CFL)<br>200MHz(SDS1204CFL, SDS1202CFL)<br>100MHz(SDS1104CFL, SDS1102CFL)<br>70MHz(SDS1074CFL, SDS1072CFL)                                 |
| BW Flatness at BNC input                               | DC -10% of rated BW: +/- 1dB<br>10% - 50% of rated BW: +/- 2dB<br>50% - 100% of rated BW: + 2dB/-3dB  |
| Lower frequency limit (AC -3dB)                        | ≤10Hz(at input BNC)   |
| Noise: Pk-Pk for 3K record                             | ≤0.6 Div for average of 10 Pk-Pk readings, Fixed gain settings<br>≤0.7 Div for average of 10 Pk-Pk readings, Variable gain settings                                 |
| SFDR including harmonics (measured with FFT)           | ≥35dB   |
| DC Gain Accuracy                                       | <±3.0%: 5mv/div to 5V/div in Fixed Gain Ranges<br><±4.0%: 2mv/div Variable Gain Ranges  |
| DC Measurement Accuracy: All Gain settings ≤100mv/div  | ±[3%* (  reading + offset  ) +1% *of  offset  +0.2div+2mv]  |
| DC Measurement Accuracy: All Gain settings > 100mv/div | ±[3%* (  reading + offset  ) +1%* of  offset  +0.2div+100mv]  |
| Rise time  | <1.2ns ( SDS1304CFL, SDS1302CFL )<br><1.8ns ( SDS1204CFL, SDS1202CFL )<br><3.5ns ( SDS1104CFL, SDS1102CFL )<br><5.0ns ( SDS1074CFL, SDS1072CFL )                    |
| Overshoot, Typical (using 500ps pulse)                 | <10% with probe or BNC input w/ 50 Ohm feed thru  |
| Ch to Ch Skew (both channels in same V/div setting)    | <1ns: SDS1304CFL,SDS1302CFL<br>SDS1204CFL,SDS1202CFL<br>SDS1104CFL,SDS1102CFL<br><2ns: SDS1074CFL,SDS1072CFL<br>(Equivalent to 2 minor divisions in smallest t/div) |

|                   |   |
|-------------------|---|
| Math operation    | +, -, *, /, FFT   |
| FFT               | Window mode: Hanning, Hamming, Blackman, Rectangular                  |
|                   | Sampling points: 1024   |
| Bandwidth limited | 20MHz $\pm$ 40% (Note: BW limited below 20MHz when using probe in x1) |

|                          |  |
|--------------------------|--|
| Horizontal System        |  |
| Real Time Sampling Rate  | Single Channel: 2GSa/s, Double Channels: 1GSa/s (When timebase faster than 25ns/div) |
| Equivalent Sampling Rate | The highest equivalent sampling rate of other Models is 50GSa/s                      |
| Measure Display Modes    | MAIN, WINDOW, WINDOW ZOOM, ROLL, X-Y   |
| Timebase Accuracy        | $\pm$ 100ppm measured over 1ms interval  |
| Horizontal Scan Range    | 1.0nS/DIV - 50S/DIV  |
|                          | Scan: 100mS/DIV $\sim$ 50S/DIV (1-2.5-5 sequence)                                    |

|   |  |
|---|--|
| Trigger System  |  |
| Trigger Types   | Edge, Pulse Width, Video,Slope, Alternative  |
| Trigger Source  | CH1,CH2,CH3,CH4,EXT,EXT/5,AC Line  |
| Trigger Modes   | Auto, Normal, Single   |
| Trigger Coupling  | AC, DC, LF rej, HF rej   |
| Trigger Level Range   | CH1,CH2,CH3,CH4: $\pm$ 6divisions from center of screen  |
|   | EXT: $\pm$ 1.2V  |
|   | EXT/5: $\pm$ 6V  |
| Trigger Displacement  | Pre-trigger: (Memory depth/ (2*sampling) ) , Delay Trigger: 260DIV   |
| Trigger Level Accuracy (typical) applicable for the signal of rising and falling time $\geq$ 20ns | Internal: $\pm$ (0.2 div $\times$ V/div)( within $\pm$ 4 divisions from center of screen)<br>EXT: $\pm$ (6% of setting + 40 mV)<br>EXT/5: $\pm$ (6% of setting + 200 mV) |
| Trigger Sensitivity   | For fixed gain ranges<br>1 Divisions: DC-10MHz<br>1.5 Divisions: 10MHz - Max BW  |
|   | EXT: 200mVpp DC-10MHz,<br>300mVpp 10MHz - Max BW   |
|   | EXT/5: 1Vpp DC-10MHz,<br>1.5Vpp 10MHz - Max BW   |
| Pulse Width Trigger   | Trigger Modes: (>, <, =)positive Pulse Width, (>, <, =)Negative Pulse Width  |
|   | Pulse Width Range: 20ns – 10s  |

|                     |  |
|---------------------|--|
| Video Trigger       | Support signal Formats: PAL/SECAM, NTSC                        |
|                     | Trigger condition : odd field, even field, all lines, line Num |
| Slope Trigger       | (>,< , =) Positive slope, (>,< , =) Negative slope             |
|                     | Time: 20ns-10s   |
| Alternative Trigger | CH1 trigger type: Edge, Pulse, Video, Slope                    |
|                     | CH2 trigger type: Edge, Pulse, Video, Slope                    |
|                     | CH3 trigger type: Edge, Pulse, Video, Slope                    |
|                     | CH4 trigger type: Edge, Pulse, Video, Slope                    |

|                             |   |
|-----------------------------|---|
| X-Y Mode                    |   |
| X-pole Input / Y-Pole Input | (CH1) / (CH2) or (CH3)/(CH4)  |
| Sample Frequency            | XY mode has a breakthrough that trad oscilloscopes restrict sampling rate at 1MSa/s. Support 25Ksa/s~250Msa/s adjusted. |

|                             |  |
|-----------------------------|--|
| Hard Ware Frequency Counter |  |
| Reading resolution          | 1 Hz   |
| Accuracy                    | ±0.01%   |
| Range                       | DC Couple, 10Hz to MAX Bandwidth   |
| Signal Types                | Satisfying all Trigger signals(Except Pulse width trigger and Video Trigger) |

|                        |   |
|------------------------|---|
| Control Panel Function |   |
| Auto Set               | Auto adjusting the Vertical, Horizontal system and Trigger Position   |
| Save/Recall            | Support 2/4 Group referenced Waveforms, 20 Group setups,20 Group captured Waveforms internal Storage/Recall function and USB flash driver storage function. |

|                         |  |
|-------------------------|--|
| Measure System          |  |
| Auto Measure (32 Types) | Vpp, Vmax, Vmin, Vamp, Vtop, Vbase, Vavg, Mean,Crms, Vrms, ROVShoot, FOVShoot, RPRESshoot, FPRESshoot, Rise time, Fall time, Freq, Period,+ Wid, -Wid, +Dut, -Dut, BWid, Phase, FRR, FRF, FFR, FFF, LRR, LRF, LFR, LFF |
| Cursor Measure          | Manual mode, Track mode and Auto mode  |

## Generic Specification

|                                     |   |       |
|-------------------------------------|---|-------|
| Display System                      |   |       |
| Display Mode                        | Color TFT 7.0in.(177.8mm)diagonal Liquid Crystal Display  |       |
| Resolution                          | 480 horizontal by 234 vertical pixels   |       |
| Display Color                       | 64K color   |       |
| Display Contrast (Typical state)    | 150:1   |       |
| Backlight Intensity (Typical state) | 300nit  |       |
| Wave display range                  | 8 x 18 div  |       |
| Wave Display Mode                   | Dots, Vector  |       |
| Persist                             | Off, 1 sec, 2 sec, 5 sec, Infinite  |       |
| Menu Display                        | 2 sec, 5 sec, 10 sec, 20 sec, Infinite  |       |
| Screen-Saver                        | Off, 1min,2min,5min,10min,15min,30 min,1hour,2hour,5hour  |       |
| Skin                                | Classical, Modern, Tradition, Succinct  |       |
| waveform interpolation              | Sin(x)/x, Linear  |       |
| Color model                         | Normal , Invert   |       |
| Language                            | Simplified Chinese, Traditional Chinese, English, Arabic, French, German, Russian, Portuguese Spanish, Japanese, Korean,Italian |       |
| Environments                        |   |       |
| Temperature                         | Operating:10℃ to +40℃<br>Not operating: -20℃ to +60℃  |       |
| Cooling                             | The fan forces it cold.   |       |
| Humidity                            | Operating: 85%RH, 40℃, 24 hours<br>Not operating: 85%RH, 65℃, 24 hours  |       |
| Height                              | Operating: 3000m<br>Not operating: 15,266m  |       |
| Power Supply                        |   |       |
| Input Voltage                       | 100-240 VAC, CAT II, Auto selection   |       |
| Frequency Scope                     | 45Hz to 440Hz   |       |
| Power                               | 50VA Max  |       |
| <b>Mechanical</b>                   |   |       |
| Dimension                           | length  | 358mm |
|                                     | Width   | 156mm |
|                                     | Height  | 118mm |
| weight                              | SDS1004CFL:4.5kg; SDS1002CFL:4.3kg  |       |

## Type Selections:

NAME:

SDS1000CFL series Digital Oscilloscope

TYPE:

SDS1072CFL SDS1074CFL 70MHz

SDS1102CFL SDS1104CFL 100MHz

SDS1202CFL SDS1204CFL 200MHz

SDS1302CFL SDS1304CFL 300MHz

## Standard Accessories:

- 1:1/10:1 probe (2/4 PCS based on channels)
- Power Cable that fits the standard of destination country
- Qualified Certification.
- Guaranty Card
- CD (including EasyScope computer software system)
- User Manual
- USB Cable

**4TECT**

ООО «4TECT»

Телефон: +7 (499) 685-4444

info@4test.ru

www.4test.ru