

SM3186 DATA SHEET

2.92mm Male to 2.4mm Female Adapter

2.92mm male to 2.4mm female adapter part number SM3186 from Fairview Microwave is in-stock and ships same day. This Fairview 2.92mm to 2.4mm adapter has a male to female gender configuration. SM3186 2.92mm male to 2.4mm female adapter operates to 40 GHz. The 2.92mm connector mates mechanically with commercially available SMA and 3.5mm connectors. The 2.4mm connector mates mechanically with commercially available 1.85mm (V) connectors. The Fairview Microwave RF adapter provides good VSWR of 1.3:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

cription	Min	Тур	Max	Units
ncy Range	DC		40	GHz
			1.3:1	
ng Voltage (AC)			150	Vrms
AC)			500	Vrms
0 0 1 1				

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 12	12 to 26.5	26.5 to 40			GHz
VSWR, Max	1.1:1	1.2:1	1.3:1			

Electrical Specification Notes:

Values at 25°C, sea level.

Mechanical Specifications

Size

 Length
 1.03 in [26.16 mm]

 Width
 0.32 in [8.13 mm]

 Weight
 0.0154 lbs [6.99 g]

Description	Connector 1	Connector 2		
Туре	2.92mm Male	2.4mm Female		
Polarity	Standard	Standard		
Mating Cycles	500	500		
Hex Size	8 mm			



Configuration:

- 2.92mm Male Connector 1
- 2.4mm Female Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.3:1 max up to 40 GHz
- 1.27 µm minimum contact plating
- Gold Plated Beryllium Copper Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1	Connector 2				
Туре	2.92mm Male	2.4mm Female				
Contact Material	Beryllium Copper	Beryllium Copper				
Contact Plating	Gold	Gold				
Contact Plating Spec.	1.27 µm minimum	1.27 µm minimum				
Insulation Material	PEI	PEI				
Outer Contact Material		Passivated Stainless Steel				
Body Material	Passivated Stainless Steel					
Coupling Nut Material	Passivated Stainless Steel					

Environmental Specifications

Temperature

Operating Range


-55 to +120 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

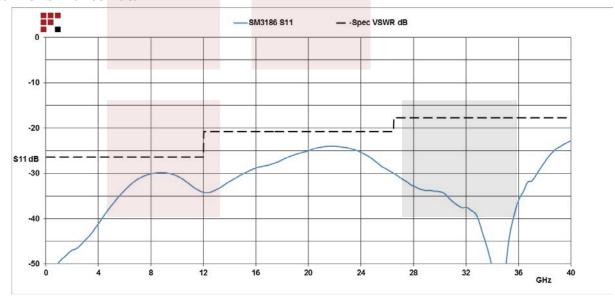





2.92mm Male to 2.4mm Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: 2.92mm Male to 2.4mm Female Adapter SM3186

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

URL: https://www.fairviewmicrowave.com/2.92mm-male-2.4mm-female-adapter-sm3186-p.aspx

to implem	ent improv	vements.	Fairview	Microwa	ave reserve	es the righ	nt to m	ake sud	ch ch	anges	as req	uire	d. Unles	ss oth	nerwise
stated, all	specificat	ions are	nominal.	Fairvie	w Microwa	ve does n	ot mak	ke any	repre	sentat	on or	war	ranty re	gard	ing the
suitability	of the par	t describ	ed hereir	n for any	particular	purpose,	and F	airview	Micr	owave	does	not	assume	any	liability
arising ou	t of the us	e of any	part or do	ocument	ation.										



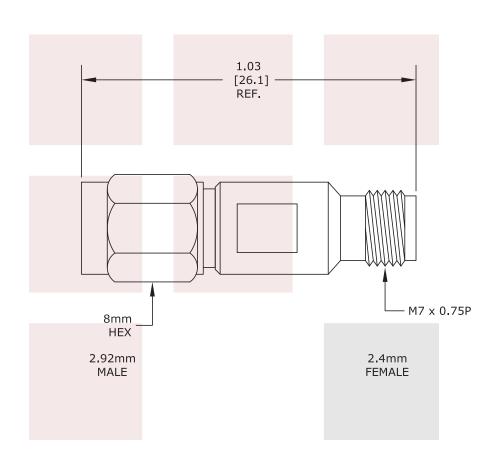

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
2.92mm Male to 2.4mm Female Adapter	DWG NO CAGE CO				3FKR5		
	CAD FILE 120215	SHEET	SCAL	E N/A	SIZE A	150	