

DP 1350

DP Range: 9 kHz - 250 MHz / 1350 W CW



Prana DP 1350

- Class A solid state
- Broadband (instantaneous single band): 9 kHz – 250 MHz
- Frequency extension between 4 kHz and 9 kHz upon request
- Typical output power : 1350 W CW
- Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
 - P1dB >950 W and H<-20dBc at 9 kHz
 - P1dB >1100 W and H<-20dBc from 10 kHz to 20 kHz
 - P1dB >1000 W and H<-20dBc from 20 kHz to 100 MHz
 - P1dB >800 W and H<-20dBc from 100 MHz to 250 MHz
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Reliable, efficient and robust
- 19" Cabinet on wheels
- 3 years standard warranty

Maintenance

- Amplifier designed for minimal maintenance
 - Easy access to all parts
 - Modular design
 - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions

- DP 1350 DC amplifier with:
 - Multicolor LCD display with touch panel
 - Digital control
 - IEEE 488 GPIB, Ethernet, USB, RS232 communications
 - Temperature controlled fans
 - Safety interlock
 - Integrated dual directional coupler
 - Display of instantaneous incident and reflected power

DP Range

- DP 90 => 90 W CW
- DP 180 => 180 W CW
- DP 340 => 340 W CW
- DP 670 => 670 W CW
- DP 1350 => 1350 W CW
- DP 2500 => 2500 W CW
- DP 5000 => 5000 W CW
- DP 10000 => 10000 W CW
- DP 16000 => 16000 W CW

Extra

- External coupler
- Bulk Current Injection + Calibration JIG
- RF Power cable
- Switching unit


4TECT

OOO «4TECT»

Телефон: +7 (499) 685-4444

info@4test.ru

www.4test.ru

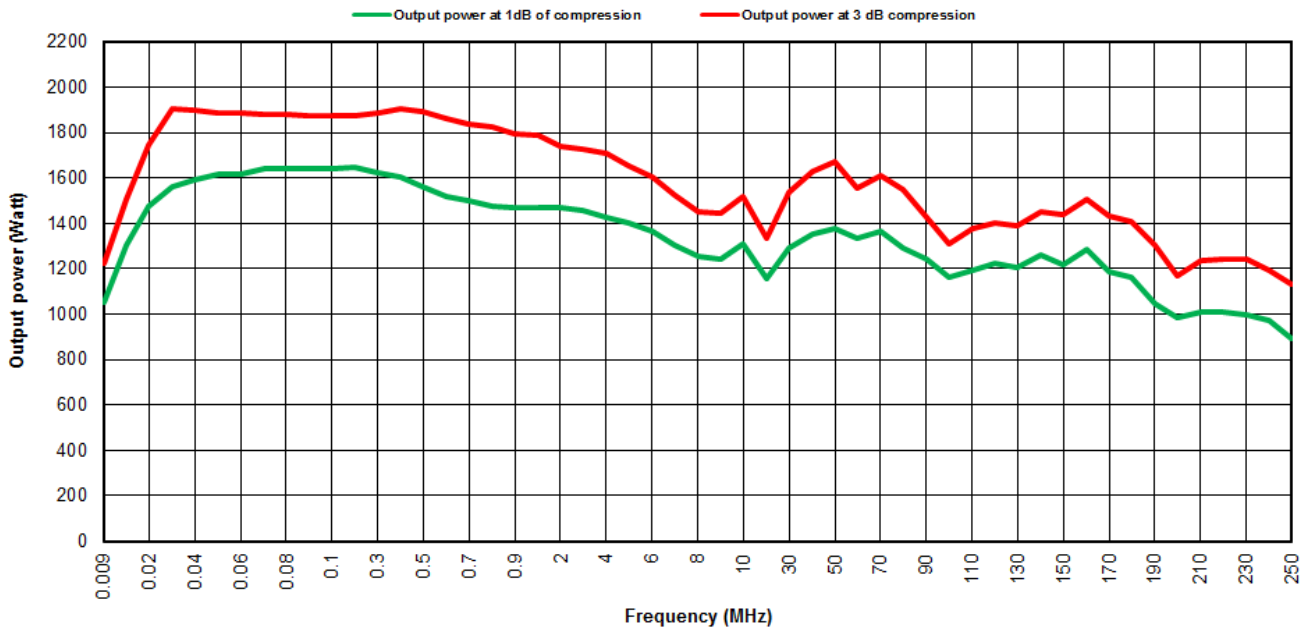

Specifications

Frequency bandwidth	9 kHz - 250 MHz
Typical output power	1350 W
Power at 3 dB compression	1150W min 9kHz/1.3kW min 10-20kHz/1.2kW min 20kHz-100MHz/1kW min 100-250MHz
Power at 1 dB compression	950W min 9kHz/1.1kW min 10-20kHz/1kW min 20kHz-100MHz/800W min 100-250MHz
Harmonics distortion	H2,H3 < -20 dBc for the output power at 1 dB compression limit
Class type	Class A
Gain	60 dB
Linear power gain flatness	± 3 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1 max
Output impedance	50 ohms / VSWR: 2:1 max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type 7/16 fem. (front or rear panel) – other connector type on request
Integrated bidirectional power coupler	Coupling factor 59 dB typ.
Power coupling connector	Type N fem. (front or rear panel)
Safety interlock	Connector type BNC
Digital control	Transistors, power supplies, internal temperatures and fans
Mismatch protection	Self limitation for reflected power > 800 W
Communication interface	Ethernet, USB, GPIB, RS232
Color LCD display with touch screen	Status, faults, direct and reverse instantaneous power
Ambient operating temperature	0 °C / + 35 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air with fan speed control: 240 l/sec max (self contained fans)
Mains voltage	47-63 Hz, 3 phases (star or delta)
Rated current	5.4 kVA
Dimensions	600 x 840 x 1050 mm (18U) / 23.6 x 33.1 x 41.3 in (18U)
Weight	198 kg / 436 lb

4TECT

OOO «4TECT»
 Телефон: +7 (499) 685-4444
 info@4test.ru
 www.4test.ru