

LT 250

LT Range: 20 MHz - 1000 MHz / 250 W CW



Prana LT 250

- Class A solid state
- Broadband (instantaneous single band): 20 MHz – 1000 MHz
- Typical output power : 250 W CW
- Linear output power guaranteed with harmonics < -20 dBc
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Upgradable to N-LT 500 possible (7U)
- Reliable, efficient and robust
- 19" Rack
- 3 years standard warranty

Maintenance

- Amplifier designed for minimal maintenance
 - Easy access to all parts
 - Modular design
 - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions

- LT 250 S : standard amplifier
- LT 250 D amplifier with:
 - Multicolor LCD display with touch panel
 - Digital control
 - IEEE 488 GPIB, Ethernet, USB, RS232 Communications
 - Temperature controlled fans
 - Safety interlock
- LT 250 SC : LT 250 S with
 - Integrated dual directional coupler
- LT 250 DC : LT 250 D with :
 - Integrated dual directional coupler
 - Display of instantaneous incident and reflected power

LT Range

- LT 140 => 140 W CW
- LT 250 => 250 W CW
- LT 500 => 500 W CW
- LT 900 => 900 W CW

Extra

- External coupler
- Supply and integration inside a cabinet
- RF Power cable
- Switching unit

4TECT

ООО «4TECT»


Телефон: +7 (499) 685-4444

info@4test.ru

www.4test.ru

LT 250

LT Range: 20 MHz - 1000 MHz / 250 W CW

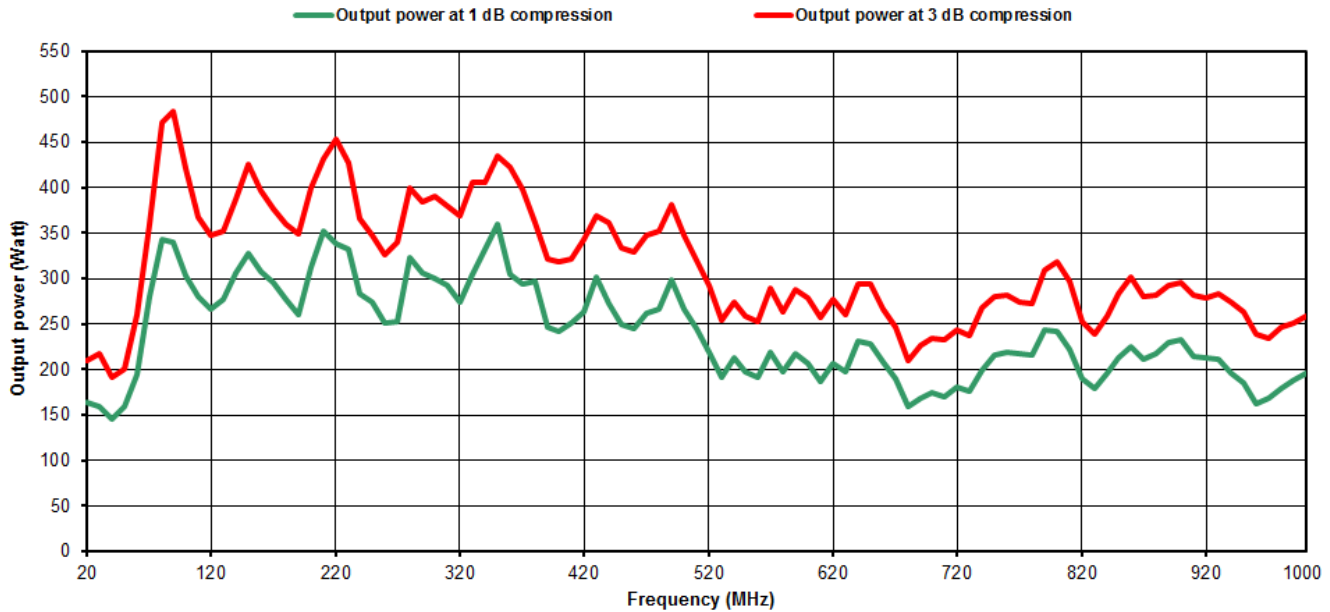

Specifications

Frequency bandwidth	20 MHz - 1000 MHz
Typical output power	250 W
Power at 3 dB compression	180Wmin up to 80MHz/ 280Wmin from 80 to 450MHz/ 190Wmin from 450MHz to 1GHz
Power at 1 dB compression	130Wmin up to 80MHz/ 200Wmin from 80 to 450MHz/ 140Wmin from 450MHz to 1 GHz
Harmonics distortion	H2,H3 < -20 dBc for the output power at 1 dB compression
Class type	Class A
Gain	51 dB
Linear power gain flatness	± 3.5 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1 max
Output impedance	50 ohms / VSWR: 2:1 max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type N fem. (front or rear panel) – other connector type on request
Ambient operating temperature	0 °C / + 45 °C (D version) or 0 °C / + 35 °C (S version)
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air with fan speed control (for D version): 60 l/sec max. (self contained fans)
Power voltage	90-250 VAC, 47-63 Hz, single phase
Rated current	13.2 A at 110 VAC / 6.3 A at 230 VAC
Dimensions	640 x 450 x 178 mm (4U) / 25.2 x 17.7 x 7 in (4U)
Weight	28 kg / 67 lb

LT 250 D version :

Safety interlock	Connector type BNC
Digital control	Transistors, power supplies, temperatures and fans
Communication interface	Ethernet, USB, GPIB, RS232
Color LCD display with touch screen	Status, faults, (direct and reverse instantaneous power for DC version)

LT 250 SC and LT 250 DC versions :

Integrated bidirectional power coupler	Coupling factor 40 dB typ. (for SC version) / 49 dB typ. (for DC version)
Power coupling connector	Type N fem. (front or rear panel)
Estimated output power losses due to the coupler	0.3 dB

4TECT

OOO «4TECT»

Телефон: +7 (499) 685-4444

info@4test.ru

www.4test.ru